

Patent Application Transmittal

(only for new nonprovisional applications under 37 C.F.R. 1.53(b))

Correspondence Address:

FROMMER LAWRENCE & HAUG LLP

745 FIFTH AVENUE

NEW YORK, NEW YORK 10151

TEL: (212) 588-0800

FAX: (212) 588-0500

JC833 U.S. PTO  
09/589593  
06/07/00

06/07/00  
JC833 U.S. PTO

Date: June 7, 2000

Attorney Docket No.: 450108-4457.2

ASSISTANT COMMISSIONER FOR PATENTS  
Box Patent Application  
Washington, D.C. 20231

Sir:

With reference to the filing in the United States Patent and Trademark Office of an application for patent in the name(s) of:

Tatsuya KUBOTA, Norio WAKATSUKI

entitled:

DATA MULTIPLEXING DEVICE, PROGRAM DISTRIBUTION SYSTEM, PROGRAM TRANSMISSION SYSTEM, PAY BROADCAST SYSTEM, PROGRAM TRANSMISSION METHOD, CONDITIONAL ACCESS SYSTEM, AND DATA RECEPTION DEVICE

X Continuing Application

     Continuation X Divisional      Continuation-in-Part (CIP)  
of prior application serial no. 09/370,776, filed August 9, 1999, which  
is a continuation of application No. PCT/JP98/03127, filed 13 July 1998.

[Note: If priority under 35 U.S.C. 120 involves a series of respectively copending applications, then in this amendment identify each and its relationship to its immediate predecessor.]

X The prior application is assigned of record to SONY CORPORATION.

The following are enclosed:

X Specification ( 68 pages)

X 24 Sheet(s) of Drawings

X 108 Claim(s) (including 6 independent claim(s))

     This application contains a multiple dependent claim

X Our check for \$ 2508.00, calculated on the basis of the claims existing in the prior application (less any claims canceled herein) as amended by any enclosed preliminary amendment as follows:

Basic Fee, \$690.00 (\$345.00)	\$ 690.00
Number of Claims in excess of 20 at \$18.00 (\$9.00) each: 88	1584.00
Number of Independent Claims in excess of 3 at \$78.00 (\$39.00) each: 3	234.00
Multiple Dependent Claim Fee at \$260.00 (\$130.00)	-0-
Total Filing Fee	\$ 2508.00

     Assignment Recording Fee \$40.00 -0-

     This application is being filed within the month following the expiration of the term originally set therefor in the prior application. This is a petition to request a -month extension of time. A check covering the cost of the petition is enclosed.

Patent Application Transmittal

(only for new nonprovisional applications under 37 C.F.R. 1.53(b))

450108-4457.2

X Oath or Declaration and Power of Attorney

       New        signed        unsigned

X Copy from a prior application (37 C.F.R. 1.63(d))

Deletion of Inventors

       Signed Statement attached deleting inventor(s) named in the prior application (37 C.F.R. 1.63(d)(2) and 1.33(b))

Power of Attorney or Correspondence Address Change

X Power of attorney and/or correspondence address was changed during prosecution of the prior application. The new power of attorney is to William S. Frommer, Reg. No. 25,506. The new correspondence address is indicated above.

X Incorporation by Reference (for continuation or divisional application) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

       A Preliminary Amendment is enclosed.  
(Claims added by this amendment have been properly numbered consecutively beginning with the number next following the highest numbered original claim in the prior application.)

X Cancel in this application original claims 1-11 and 120-122 of the prior application before calculating the filing fee. (At least one original independent claim must be retained for filing purposes.)

X New formal drawings are enclosed.

X Certified copy of each foreign priority application on which the claim for priority under 35 U.S.C. 119 is based was filed in prior U.S. application serial no. 09/370,776, filed August 9, 1999. A list of said foreign priority application(s) is provided below. Acknowledgement thereof is requested.

<u>Application No.</u>	<u>Filed</u>	<u>In</u>
9-171039	11 June 1997	Japan

Please charge any additional fees required for the filing of this application or credit any overpayment to Deposit Account No. 50-0320.

Respectfully submitted,

FROMMER LAWRENCE & HAUG LLP  
Attorneys for Applicants  
WILLIAM S. FROMMER

By William S. Frommer  
Reg. No. 25,506

A

JC833 U.S. PRO  
09/589593

06/07/00

06/07/00

[illegible]

(Typed or printed name of person mailing paper or fee)

(Signature of person mailing paper or fee)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Division of Serial No. 09/370,776

Applicants : Tatsuya KUBOTA, et al.

Filed : Herewith

For : DATA MULTIPLEXING DEVICE, PROGRAM DISTRIBUTION  
SYSTEM, PROGRAM TRANSMISSION SYSTEM, PAY  
BROADCAST SYSTEM, PROGRAM TRANSMISSION METHOD,  
CONDITIONAL ACCESS SYSTEM, AND DATA RECEPTION  
DEVICE

Art Unit : 4457

745 Fifth Avenue  
New York, New York 10151  
Tel. (212) 588-0800

EXPRESS MAIL

Mailing Label Number EL560676843US

Date of Deposit June 7, 2000

I hereby certify that this paper or fee is being  
deposited with the United States Postal Service  
"Express Mail Post Office to Addressee" Service  
under 37 CFR 1.10 on the date indicated above and  
is addressed to the Assistant Commissioner for  
Patents, Washington, D.C. 20231.

Charles Jackson

(Typed or printed name of person  
mailing paper or fee)

Charles Jackson

(Signature of person mailing paper or fee)

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents  
Box Patent Application  
Washington, D.C. 20231

Sir:

Before the issuance of the first Official Action,  
please amend the above-identified application as follows:

IN THE SPECIFICATION:

Please amend the specification as follows:

Page 1, before line 1, add the following:


--This is a division of copending application serial no. 09/370,776, filed August 9, 1999, which is a continuation of application no. PCT/JP98/03127 filed July 13, 1998--.

REMARKS

This amendment is made to provide proper reference to the lineage of applications from which the present application is derived.

Respectfully submitted,

FROMMER LAWRENCE & HAUG LLP  
Attorneys for Applicants

By:   
William S. Frommer  
Registration No. 25,506  
Tel. (212) 588-0800

PATENT  
450108-4457

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION FOR LETTERS PATENT

TITLE: DATA MULTIPLEXING DEVICE, PROGRAM DISTRIBUTION  
SYSTEM, PROGRAM TRANSMISSION SYSTEM, PAY  
BROADCAST SYSTEM, PROGRAM TRANSMISSION METHOD,  
CONDITIONAL ACCESS SYSTEM, AND DATA RECEPTION  
DEVICE

INVENTORS: Tatsuya KUBOTA, Norio WAKATSUKI

William S. Frommer  
Registration No. 25,506  
FROMMER LAWRENCE & HAUG LLP  
745 Fifth Avenue  
New York, New York 10151  
Tel. (212) 588-0800

## SPECIFICATION

Data Multiplexing Device, Program Distribution System, Program Transmission System, Pay Broadcast System, Program Transmission Method, Conditional Access System, and Data Reception Device

### Technical Field

The present invention relates to a data multiplexing device, a program distribution system, a program transmission system, a pay broadcast system, a program transmission method, a conditional access system, and a data reception device and is preferably applied to, for example, a data multiplexing device and a data reception device for a digital broadcast system which performs compression-coding and multiplexing of video data and audio data for transmission.

### Background Art

Recently, a digital broadcast system has been proposed which uses MPEG2 (Moving Picture Experts Group Phase 2) to compress and encode video data and audio data and then broadcasts encoded streams of data over a ground wave or a satellite wave. This digital broadcast system generates a plurality of transport packets for a plurality of programs

each consisting of encoded video streams and encoded audio streams by dividing elementary data such as video data or audio data of each program into a predetermined number of bytes and appending a header to the beginning of each block of divided data. Then these transport packets are multiplexed to broadcast them over a ground wave or a satellite wave.

When a reception device receives transmitted data, that is, multiplexed transport packets, it can obtain the encoded video streams and encoded audio streams of each program by reading out the header information of each transport packets from the received data and restoring the original unmultiplexed elementary data based on the header information.

In such a digital broadcast system, a program generally consists of a plurality of data elements (video data and audio data for a plurality of channels). Therefore, for such a digital broadcast system, it is desirable that an audience should subscribe for each data element contained in a program. For example, suppose that a program consists of a total of four types of data elements, that is, video data, main audio data, subaudio data, and additional data. For a prior digital broadcast system, an audience had to subscribe for each program, that is, all of six data elements. Accordingly, even if a recipient wanted to subscribe only

for video data and main audio data, he or she had to subscribe for also unnecessary elements (subaudio and additional data).

Moreover, since a prior scramble device was used before multiplexing, the apparatus must include a scramble device for each program and was unavoidably made large.

In addition, a prior digital broadcast system multiplexed program subscription information and cryptanalytic keys into programs at certain intervals and then transmitted them. Since the highest bit rate of multiplexed streams is limited, the transmission rate may not be sufficiently high for a program due to the transmission of such program subscription information and cryptanalytic keys. Therefore, there was a problem that if a sufficient transmission rate could not be ensured, a transmission buffer for buffering any program data might overflow.

#### Disclosure of the Invention

The present invention has been devised in light of the foregoing and proposes a digital broadcast system which allows a recipient to receive only necessary data elements among the data elements constituting a program, that is, which can scramble each data element.

The present invention proposes a digital broadcast

system which can minimize the device configuration by avoiding provision of a scramble device for each program.

The present invention proposes a digital broadcast system which can avoid any overflow from a transmission buffer for buffering any program data.

In order to solve such problems, the present invention provides a data multiplexing device which multiplexes and transmits the transport stream packets of program data consisting of a plurality of data elements constructed in the form of transport stream packets. The data multiplexing device comprises a scramble key generation means for generating a scramble key corresponding to a data element and a scramble means for scrambling the corresponding transport stream packet of data element by using a scramble key generated by the scramble key generation means, so that the data multiplexing device may generate a scramble key corresponding to one or more data elements among the plurality of data elements constituting a program and scramble each data element.

By scrambling each data element, an audience can subscribe for each data element.

The present invention provides a program distribution system for distributing a program consisting of a plurality of data elements, which not only manages subscribers' subscriptions for each program or data element through a

subscriber management system but generates for each data element a scramble key used for descrambling the data elements contained in the program and based on the generated scramble key, selectively scrambles each data element with respect to encoded data elements contained in a multiplexed stream, so that an audience can subscribe for each data element.

The present invention provides a program transmitting system for transmission a program consisting of a plurality of data elements, which in order for a subscriber to watch and/or hear only programs and data elements for which the subscriber has subscribed, generates a plurality of scramble keys used for scrambling the plurality of data elements contained in the program, selectively scrambles each data element based on the generated scramble key, and multiplexes the scrambled data elements for transmission, so that an audience can subscribe for each data element and descramble only thus subscribed data elements to watch and/or hear them.

The present invention provides a pay broadcast system for broadcasting a program consisting of a plurality of data elements, which not only manages subscribers' subscriptions for each program or data element through a subscriber management system but generates for each data element a scramble key used for descrambling the data elements contained in the program and based on the generated scramble

key, selectively scrambles each data element with respect to encoded data elements contained in a multiplexed stream, so that an audience can subscribe for each data element.

The present invention provides a conditional access system for providing a conditional access to only subscribed programs or data elements among a plurality of programs distributed by a program distribution system or a plurality of data elements constituting the programs, which, from a plurality of transport stream packets containing a plurality of encryption scramble keys, filters any transport stream packet containing an encryption scramble key associated with a program or data element subscribed for by a recipient, deciphers the plurality of encryption scramble keys contained in the plurality of filtered transport stream packets, generates a plurality of deciphered scramble keys, and descrambles each data element by using a plurality of deciphered scramble keys corresponding to a plurality of data elements, so that an audience can subscribe for each data element and descramble only thus subscribed data elements to watch and/or hear them.

According to the present invention, by scrambling each multiplexed transport stream packet with the respectively corresponding scramble key, the circuit configuration for scrambling can be made simpler than that for scrambling each transport stream packet before multiplexing.

The present invention comprises a plurality of buffer memories which store a plurality of data packets constituting a plurality of data elements, a multiplexing means which has a switch means for switching the buffer memories and which time-division multiplexes a plurality of packet data strings to provide an output by sequentially time-division switching the buffer memories with the switch means, and a switch control means which selects, according to an input rate for the packet data strings, the plurality of buffer memories switchable by the switch means. Accordingly, any overflow from a buffer memory for buffering higher priority data elements can be avoided by switchably controlling the switch means to exclude a buffer memory for buffering lower priority information among the plurality of buffer memories, when the input rate is higher than a reference rate.

The present invention provides a data reception device for receiving multiplexed data obtained by multiplexing the transport stream packets of program data consisting of a plurality of data elements constructed in the form of transport stream packets, which comprises a scramble key extract means for extracting from the multiplexed data a scramble key corresponding to each data element and a descramble means for descrambling the transport stream packet for each data element contained in the multiplexed

data by using a scramble key extracted by the scramble key extract means, so that each data element can be descrambled separately by descrambling the transport stream packet for each data element corresponding to a scramble key by using the scramble key.

#### Brief Description of the Drawings

Figure 1 is a block diagram showing the configuration of a digital broadcast system according to the present invention;

Figure 2 is a schematic diagram showing the correspondence between elementary data contained in each program and scramble keys;

Figure 3 is a schematic diagram showing the correspondence between information to be recorded in transport stream packets and their PID values;

Figure 4 is a schematic diagram showing the correspondence between transport packet types and their PID values;

Figure 5 is a block diagram showing the configuration of an encoding system;

Figure 6 is a schematic diagram showing the syntax for a transport packet;

Figure 7 is a schematic diagram showing the syntax for a transport packet;

Figure 8 is a schematic diagram showing the syntax for a transport packet;

Figure 9 is a schematic diagram showing the syntax for a transport packet;

Figure 10 is a block diagram showing the configuration of a multiplexer system;

Figure 11 is a schematic diagram showing the correspondence between each table and its PID;

Figure 12 is a schematic diagram showing the syntax for a program association section;

Figure 13 is a schematic diagram showing the syntax for a program association section;

Figure 14 is a schematic diagram showing the correspondence between each section and its PID value;

Figure 15 is a schematic diagram showing the syntax for a program map section;

Figure 16 is a schematic diagram showing the syntax for a program map section;

Figure 17 is a schematic diagram showing the syntax for a conditional access section;

Figure 18 is a schematic diagram showing the syntax for a conditional access section;

Figure 19 is a schematic diagram showing the syntax for a conditional access descriptor;

Figure 20 is a schematic diagram showing the PIDs of

elementary data expressed by each table and the contents of the descriptors;

Figure 21 is a schematic diagram showing the data configuration for EMM packets;

Figure 22 is a schematic diagram showing the data configuration for ECM packets; and

Figure 23 is a block diagram showing the configuration of a reception device.

#### Best Mode for Carrying Out the Invention

Now, an embodiment of the present invention is described below with reference to the drawings.

Referring to Figure 1, a data broadcast system to which a data multiplexing device according to the present invention is applied, is described.

This data broadcast system is a system used for a pay broadcast system such as a satellite digital broadcast system or a ground wave digital broadcast system and as shown in Figure 1, comprises a broadcast data processing system BDPS (Broadcast\_Data\_Processing\_System) 1, a subscriber management system SMS (Subscriber\_Management\_System) 2, a subscriber authorization system SAS (Subscriber\_Authorization\_System) 3, an EPG (Electronic\_Program\_Guide) system 4, a server system 5, a routing system 6, an encoding system 7, a multiplexer system

8, an encoder/multiplexer control unit 9, and a modulation circuit 10.

The broadcast data processing system 1 is a system for controlling all systems and devices provided within a broadcast station such as the subscriber management system 2, the subscriber authorization system 3, the EPG system 4, the server system 5, the routing system 6, the encoding system 7, the multiplexer system 8, the encoder/multiplexer control unit 9, and the modulation circuit 10. This broadcast data processing system 1 has program planning tables registered with itself, which are used for managing air times for every material including program and promotion materials supplied by program suppliers and program and CM materials produced by the station itself. The broadcast data processing system 1 controls each device and system according to the program planning tables. Such a program planning table consists of a service information file which contains information for program suppliers, an event information file which contains program schedules recorded on a one-hour or one-day basis, and an operation information file which contains program time schedules recorded on a 15-sec basis.

The subscriber management system 2 is a system used for managing subscriber management information such as subscriber registration information and tolling information. Specifically, the subscriber management system 2 is a core

002090"685550

system in a pay broadcast system, which has major functions such as subscription, accounting, and billing. In addition, the subscriber management system 2 has another function for managing information on keys such as a scramble key  $K_s$  for scrambling a data element and a work key  $K_w$  for enciphering such a scramble key  $K_s$  as well as information on broadcast contractors, program suppliers, and programming agencies. The subscriber management system 2 has still another function for processing, in real time, audience information supplied by an IRD provided at the receiving end through a telephone line. The subscriber management system 2 eventually provides to the subscriber authorization system 3 described later, some EMM (Entitlement\_Management\_Message) data which contains information on subscription as well as a work key  $K_w$ . Such EMM data will be described later in detail.

The subscriber authorization system 3 generates an enciphered work key  $K_w'$  by enciphering a work key  $K_w$  contained in the EMM data received from the subscriber management system 2 through a predetermined encryption algorithm using a master key  $K_m$ . It should be appreciated that an encryption algorithm used for a digital broadcast system according to the present invention is an encryption algorithm called CRYPS (a trademark of SONY) developed by the present applicant, which adopts a block encryption

002030 2698360

technique similar to the DES system established by the Department of Commerce. The subscriber authorization system 3 replaces a work key Kw contained in the EMM data supplied by the subscriber management system 2 with a work key Kw' enciphered through the encryption algorithm CRYPS and then generates thus enciphered EMM data. In order to transmit such EMM data enciphered through the present applicant's unique encryption algorithm via satellites, the subscriber authorization system 3 translates the enciphered EMM data into transport stream packets by inserting the enciphered EMM data in the payload section of a transport stream packet. In the following description, a transport stream packet containing such EMM data will be referred to as an EMM packet. It should be also appreciated that the subscriber authorization system 3 receives a PID (packet identifier) given to such an EMM packet from the encoder/multiplexer control unit 9 described later over a network.

The subscriber authorization system 3 has a work key table in which 256 work keys (Kw) are associated with work key identification numbers (Kw\_No) for identifying these work keys and this work key table can be downloaded into memory of the multiplexer system 8 over a network. The reason why such a work key table is downloaded into the multiplexer system 8 is that the multiplexer system 8 obtains an unenciphered work key Kw from the work key

identification numbers (Kw\_No) because only enciphered work keys Kw' are transmitted by the subscriber authorization system 3 to the multiplexer system 8.

Moreover, the subscriber authorization system 3 generates a scramble key Ks to scramble each data element contained in a transmitted program. In this regard, the subscriber authorization system 3 generates a different scramble key Ks for each program or for each data element contained therein. For example, as shown in Figure 2, a scramble key Ks1 is generated for scrambling the video data and main audio data constituting the first program, respectively, a scramble key Ks2 is generated for scrambling the video data and main audio data constituting the second program, a scramble key Ks3 is generated for scrambling the subaudio data of the second program, and a scramble key Ks4 is generated for scrambling the private data of the second program. Which scramble key is assigned to which element of which program can be determined by the subscriber authorization system 3 arbitrarily, depending on the content of the program. For example, as with the fourth program, different scramble keys Ks7 through Ks10 can be assigned to the video data, main audio data, subaudio data, and private data, respectively, or as with the fifth program, the same scramble key Ks11 can be assigned to all the video data, main audio data, subaudio data, and private data.

Moreover, in order to enhance the security level of the encryption/decryption system used for the digital broadcast system, the subscriber authorization system 3 updates these scramble keys Ks1 through Ks19 at intervals of 4 seconds with a random number generator within the subscriber authorization system 3.

In addition, the subscriber authorization system 3 generates a plurality of ECM (Entitlement\_Control\_Message) data items used for descrambling. This ECM data consists of a work key number for specifying at least a work key Kw listed in the work key table, a scramble key Ks for scrambling data streams, and a CA\_system\_ID for identifying the subscriber authorization system 3. Therefore, in the example where 19 scramble keys Ks1 through Ks19 are used as shown in Figure 2, the subscriber authorization system 3 generates 19 ECM data items, because only a scramble key is registered with an ECM data item.

In order to transmit such a plurality of generated ECM data items, the subscriber authorization system 3 further translates the plurality of ECM data items into transport stream packets by inserting the plurality of ECM data items in the payload section of a transport stream packet. In the following description, a transport stream packet containing such ECM data will be referred to as an ECM packet. In Figure 1, the term ECM1 shows an ECM packet containing the

scramble key Ks1, the term ECM2 shows an ECM packet containing the scramble key Ks2, and similarly, the terms ECM3 through ECM19 show ECM packets containing the scramble keys Ks3 through Ks19, respectively. It should be also appreciated that the subscriber authorization system 3 receives a PID (packet identifier) given to each of the plurality of ECM packets from the encoder/multiplexer control unit 9 described later over a network. It should be further appreciated that in Figure 1, the ECM packets are shown to be supplied directly to the multiplexer system but this is only for the sake of clarity and in fact the ECM packets will be supplied to the multiplexer system 8 via a network and the encoder/multiplexer control unit 9.

Now, why the above-mentioned work keys and scramble keys are to be used for the digital broadcast system is described below.

A typical digital broadcast system generally uses a pay broadcast system which authorizes only subscribers to watch and/or hear the programs and sends accounts to those subscribers based on their subscription conditions. To accomplish a pay broadcast system, such a digital broadcast system must scramble programs with scramble keys generated by the broadcast station before transmission and allow only subscribers to descramble the programs to watch and/or hear them. Specifically, in order to allow only subscribers to

descramble such scrambled data elements at the receiver end, scramble keys  $K_s$  used in scrambling must be used also for descrambling. To automatically descramble programs transmitted via satellites, these scramble keys  $K_s$  must be transmitted to the receiver end.

However, if these scramble keys  $K_s$  are to be transmitted to the receiver end, an unauthorized recipient may be able to obtain these scramble keys  $K_s$  and consequently to watch and/or hear all transmitted programs free of charge. Therefore, at the first level of security, the pay broadcast system according to the present invention changes these scramble keys  $K_s$  at intervals of several seconds with a random number generator and enciphers these scramble keys  $K_s$  with work keys  $K_w$ . The encryption of scramble keys  $K_s$  with a random number generator can be accomplished by software and therefore, can provide a much higher level of security for the encryption technique.

To further enhance the security level of a conditional access system, the digital broadcast system according to the present invention enciphers these scramble keys  $K_s$  by using work keys  $K_w$  in an encryption circuit 822 of the multiplexer system 8 which is described later and then transmits enciphered scramble keys  $K_s'$  to the receiver end. That is, the security level can be enhanced to the utmost by transmitting enciphered scramble keys  $K_s$  rather than by

transmitting the scramble keys Ks themselves used in scrambling programs. At the receiver end, a decrypter for deciphering the enciphered scramble keys Ks' is provided in a security module (IC card) in the receiver and all decryption operations are performed in the security module. The security module composed of an IC card has such a structure that the program code contained therein cannot be decoded in effect and therefore, it may be quite difficult for an outsider to decipher the scramble keys.

The EPG system 4 is a system to create program guide data associated with transmitted programs. Program guide data (EGP data) refers to, for example, data for informing air times of programs to be broadcasted in future, character data for explaining the contents of selected programs, and title data for programs. The EPG data may be created mainly by the broadcast station or a program supplier may create special EPG data for its own programs.

The server system 5 consists of a server constructed by connecting disk drives containing various materials into an array and a server control computer for controlling the recording/playback operations of the server. The server system 5 is connected to the broadcast data processing system 1 through the LAN in the broadcast station such as Ethernet, so that it can be controlled to transmit programs according to a program planning list of the program data

processing system. The server system 5 has several server functions corresponding to the types of materials recorded therein, such as a CM server function for supplying CM materials, a daily server function for supplying television program materials and news program materials, and a video-on-demand (VOD) server function for supplying television program materials and movie materials, and can provide a plurality of desired programs over a certain channel under the control of the broadcast data processing system 1.

The routing system 6 is a system for routing multichannel data supplied by the server system 5 to appropriate channels. The routing system 6 is connected to the broadcast data processing system 1 through Ethernet, so that it can be controlled to transmit programs over appropriate channels according to a program planning list of the program data processing system.

The encoder/multiplexer control unit 9 supplies control commands to control the encoding system 7 and the multiplexer system 8 to the encoding system 7 and the multiplexer system 8 via a network. The encoder/multiplexer control unit 9 receives an EPG packet from the EPG system 4 via the network as well as ECM packets (ECM1 through ECM19) and an EMM' packet from the subscriber authorization system 3 via the network and then supplies the received EPG, EMM', and ECM packets to the multiplexer system 8. In addition,

the encoder/multiplexer control unit 9 supplies private data to the encoding system 7 as well as program specific information (PSI: Program\_Specific\_Information) to the multiplexer 8.

Program specific information PSI consists of a program association table (PAT: Program\_Association\_Table) for showing a specified program number and its corresponding transport stream packet in a program map table (PMT), a program map table (PMT: Program\_Map\_Table) for showing a transport stream packet in which data elements for the specified program are described, and a conditional access table (CAT: Conditional\_Access\_Table) for specifying a transport stream packet containing EMM data. The encoder/multiplexer control unit 9 generates a program association table PAT, a program map table PMT, and a conditional access table CAT and provides these generated tables in the form of a transport stream. In the following description, a transport stream packet containing such a program association table PAT will be referred to as a PAT packet, a transport stream packet containing such a program map table PMT will be referred to as a PMT packet, and a transport stream packet containing such a conditional access table CAT will be referred to as a CAT packet.

In order to assign appropriate packet identifiers PID to transport stream packets created by the EPG system 4, the

subscriber authorization system 3, and the encoding system 7, the encoder/multiplexer control unit 9 generates the appropriate packet identifiers PID and supplies them to the subscriber authorization system 3, the EPG system 4, and the encoding system 7.

A packet identifier (PID: Packet Identification) is an identifier for identifying a transport stream packet. Such a packet identifier PID is unique data of 13 bits determined according to the type of data stored in the payload of a transport stream packet. For example, as shown in Figure 3, a PID value of "0x0000" is specified for a transport stream packet which stores information on a program association table PAT in its payload, and a PID value of "0x0001" is specified for a transport stream packet which stores information on a conditional access table CAT in its payload. One of the PID values "0x0020" through "0x1FFE" is selected as a PID value for a transport stream packet which stores information on a program map table PMT or elementary data such as video data and audio data in its payload.

When generating a PID to be assigned to each transport stream packet, the encoder/multiplexer control unit 9 generates a PID table showing the correspondence between PIDs specified for transport stream packets and scramble keys Ks used for scrambling. The PID table is a table for storing the previously used PID values and by referring to

the PID values stored in the PID table, the encoder/multiplexer control unit 9 can determine whether a PID value has been used previously and generate a new PID value which is not a duplicate of any previous PID value. The PID table is used also for determining whether a multiplexed transport stream packet should be scrambled.

For example, as shown in Figure 4, the PID table shows the correspondence between PIDs specified for generated transport stream packets and scramble keys Ks used for data stored in the corresponding transport stream packets. In Figure 4, a PID value for PAT packets is fixed to "0x0000", a PID value specified for PMT packets corresponding to the first program is "0x0100", a PID value specified for PMT packets corresponding to the second program is "0x0101", a PID value specified for ECM packets with a scramble key Ks1 for scrambling Video[1] packets used for video data of the first program and Main\_Audio[1] packets used for main audio data is "0x0300", a PID value specified for ECM packets with a scramble key Ks2 for scrambling Video[2] packets used for video data of the second program is "0x0301", a PID value specified for ECM packets with a scramble key Ks2 for scrambling Main\_Audio[2] packets used for main audio data of the second program is "0x0302", a PID value specified for ECM packets with a scramble key Ks3 for scrambling Sub\_Audio[2] packets used for subaudio data of the second

program is "0x0303", and a PID value specified for ECM packets with a scramble key Ks4 for scrambling Private[2] packets used for private data of the second program is "0x0304". A PID value specified for Video[1] packets used for video data of the first program is "0x0500" and this type of packets are scrambled with a scramble key Ks1. A PID value specified for Main\_Audio[1] packets used for main audio data of the first program is "0x0501" and this type of packets are scrambled with a scramble key Ks1. A PID value specified for Video[2] packets used for video data of the second program is "0x0502" and this type of packets are scrambled with a scramble key Ks2. A PID value specified for CAT packets is fixed to "0x0001" and a PID value specified for EMM packets is "0x700".

As shown in Figure 5, the encoding system 7 comprises a plurality of MPEG video encoders 711V through 719V for encoding video data supplied over a plurality of channels according to the MPEG2 standard, MPEG audio encoders 711A through 719A for encoding a plurality of audio data streams corresponding to the video data streams according to the MPEG2 standard, multiplexing circuits 721 through 729 for multiplexing streams supplied by each video encoder and each audio encoder and private data streams supplied by the encoder/multiplexer control unit 9, and an encoding controller 70 for controlling the video/audio encoders 711

through 719 and the multiplexing circuits 721 through 729. It should be appreciated that the encoding system as shown in Figure 5 is configured to encode programs for 9 channels but, of course, it may handle not only 9 channels but any number of channels.

Each of the video encoders 711V through 719V generates encoded bit streams by encoding video data according to the MPEG2 standard. Then the video encoder generates PES (Packetized Elementary Stream) packets by dividing an encoded bit stream in picture units and appending a header to the divided bit stream. Next, the video encoder generates transport stream packets by dividing a PES packet in 184 bytes and appending a header of 4 bytes to the divided bit stream of 184 bytes. Data consisting of transport stream packets arranged in a stream is called a transport stream. In generating transport stream packets, the encoder/multiplexer control unit 9 supplies to each of the video encoders 711V through 719V a packet identifier (PID) for identifying a transport stream packet containing the encoded video data.

Each of the audio encoders 711A through 719A generates encoded bit streams by encoding main audio data and subaudio data according to the MPEG2 standard. Like the video encoders, each of the audio encoders 711A through 719A generates PES packets from the bit streams and then

generates transport stream packets containing audio data by dividing a PES packet in 184 bytes and appending a header of 4 bytes. In generating transport stream packets, the encoder/multiplexer control unit 9 supplies to each of the audio encoders 711A through 719A a packet identifier (PID) for identifying a transport stream packet containing the encoded audio data.

Each of the multiplexing circuits 721 through 729 generates a transport stream by multiplexing a transport stream containing encoded video data, a transport stream containing encoded audio data, and a transport stream containing private data. Specifically, the multiplexing circuit multiplexes these streams by switching between the transport stream containing encoded video data, the transport stream containing encoded audio data, and the transport stream containing private data in units of transport stream packets. Therefore, in an output transport stream, transport stream packets containing encoded video data, transport stream packets containing encoded audio data, and transport stream packets containing private data are intermingled. In this regard, private data is placed in a transport stream packet by the encoding controller 70 and then supplied to each of the multiplexing circuits through a network.

The encoding controller 70 specifies an appropriate



The sync\_byte field is a field having a fixed length of 8 bits and detects a synchronous pattern in the bit stream. This field is defined to have a fixed value of "01000111" (0X47) and can detect a synchronous condition by detecting this bit pattern in the stream.

The transport\_error\_indicator field is a flag of 1 bit and when set to "1", indicates that an uncorrectable error of at least 1 bit exists in the transport stream packet.

The payload\_unit\_start\_indicator field is a flag of 1 bit and has a meaning significant to transport stream packets which carry video/audio data and other elementary data or program specific information (PSI). If the payload section of a transport stream packet contains elementary data, the payload\_unit\_start\_indicator field has the following meaning: when the payload\_unit\_start\_indicator field is "1", it indicates that elementary data is inserted at the beginning of the payload section of this transport stream packet; when the payload\_unit\_start\_indicator field is "0", it indicates that elementary data is not inserted at the beginning of the payload section of this transport stream packet. If the payload\_unit\_start\_indicator field is set to "1", it indicates that only one PES packet starts at a certain transport stream packet. On the contrary, if the payload section of a transport stream packet contains PSI data, the payload\_unit\_start\_indicator field has the

following meaning: when the transport packet carries the first byte of the PSI section, the payload\_unit\_start\_indicator field is "1"; when the transport stream packet does not carry the first byte of the PSI section, the payload\_unit\_start\_indicator field is "0". If the transport stream packet is a null packet, the payload\_unit\_start\_indicator field is also "0".

The transport\_priority field is an identifier of 1 bit for indicating the priority of a transport packet. When the transport\_priority field is set to "1", this transport packet is a packet having the same packet identifier PID, which indicates that this packet has a higher priority than that having the transport\_priority field set to a value other than "1". For example, a certain packet in an elementary stream can be assigned a priority by setting a packet identifier of the transport\_priority field.

The transport\_scrambling\_control field is data of 2 bits for indicating the scrambling mode of the transport stream packet payload. The scrambling mode indicates whether data stored in the payload has been scrambled and the type of scramble. It is required by the standard that the transport stream packet header and the adaptation field should not be scrambled with a scramble key  $K_s$ . Therefore, by using this transport\_scrambling\_control field, it can be determined whether data stored in the transport stream

random\_access\_indicator,  
elementary\_stream\_priority\_indicator, PCR\_flag, OPCR\_flag;  
splicing\_point\_flag, splicing\_point,  
transport\_private\_data\_flag, adaptation\_field\_extension\_flag,  
program\_clock\_reference (PCR),  
original\_program\_clock\_reference (OPCR), splice\_countdown,  
transport\_private\_data\_length, private\_data,  
adaptation\_field\_extension\_length, ltw\_flag  
(legal\_time\_window flag), piecewise\_rate\_flag, and  
seamless\_splice\_flag.

The adaptation\_field\_length field is data indicating the number of bytes of an adaptation field following this adaptation\_field\_length field. If the adaptation\_field\_control field is "11", the adaptation\_field\_length is 0 through 182 bits; if the adaptation\_field\_control is "10", the adaptation\_field\_length is 183 bits. It should be appreciated that stuffing is required to fill in with some bits when elementary streams are not enough to fill in the payload of a transport stream.

The discontinuity\_counter field is data indicating whether a system clock reference (SCR) is reset in the middle of a plurality of packets with the same PID to be discontinuous. If the system clock reference is discontinuous, this discontinuity\_counter field is "1"; if

the system clock reference is still continuous, this discontinuity\_counter field is "0". It should be appreciated that the system clock reference is reference information which an MPEG decoder for decoding video and audio data uses to set a system time clock for the decoder to a timing value intended by the encoder.

The random\_access\_indicator field is data indicating the beginning of a video sequence header or an audio frame. That is, this random\_access\_indicator field is data indicating an access point (which is the beginning of a frame) for video or audio data when data elements are accessed randomly.

The elementary\_stream\_priority\_indicator field is data indicating the priority of elementary stream data carried in the payload of this transport stream packet in packets with the same PID. For example, when video data of an elementary stream is intra-coded, the elementary\_stream\_priority\_indicator field is set to "1". On the contrary, the elementary\_stream\_priority\_indicator of a transport stream containing inter-coded video data is set to "0".

The PCR\_flag field is data indicating whether PCR (program\_clock\_reference) data exists in an adaptation field. If PCR data exists in the adaptation field, the PCR\_flag field is set to "1"; if no PCR data exists, the PCR\_flag

field is set to "0". It should be appreciated that the PCR data is used by a decoder at the receiver end to obtain a proper timing of a decoding operation for decoding transmitted data.

The OPCR\_flag field is data indicating whether OPCR (original\_program\_clock\_reference) data exists in an adaptation field. If OPCR data exists in the adaptation field, the OPCR\_flag field is set to "1"; if no OPCR data exists, the OPCR\_flag field is set to "0". It should be appreciated that the OPCR data is used by a splicing operation to reconstruct a transport stream from a plurality of original transport streams and indicates PCR data for an original transport stream.

The splicing\_point\_flag field is data indicating whether splice\_countdown data exists in an adaptation field to show an edit point (splice point) at the transport level. If splice\_countdown data exists in the adaptation field, the splicing\_point\_flag field is "1"; if no splice\_countdown data exists in the adaptation field, the splicing\_point\_flag field is "0".

The transport\_private\_data\_flag field is data indicating whether private data used to describe certain user data exists in an adaptation field. If private data exists in the adaptation field, the transport\_private\_data\_flag field is set to "1"; if no

private data exists in the adaptation field, the transport\_private\_data\_flag field is set to "0".

The adaptation\_field\_extension\_flag field is data indicating whether an extension field exists in an adaptation field. If an extension field exists in the adaptation field, the adaptation\_field\_extension\_flag field is set to "1"; if no extension field exists in the adaptation field, the adaptation\_field\_extension\_flag field is set to "0".

The program\_clock\_reference (PCR) is a reference clock to be referenced when the clock at the receiver end is made in phase with the clock at the transmitting end. This PCR data contains time data when each transport packet is generated. The PCR data is 42 bits long, consisting of program\_clock\_reference\_base of 33 bits and program\_clock\_reference\_extension of 9 bits. 24 hours can be counted by counting the system clock in the range of 0 through 299 with the program\_clock\_reference\_extension and adding a bit to the program\_clock\_referece\_base with a carry generated when the count 299 is reset to 0.

The original\_program\_clock\_reference (OPCR) field is data used to reconstruct a single program transport stream from certain transport streams. When such a single program transport stream is completely reconstructed, the original\_program\_clock\_reference is copied into the

program\_clock\_reference field.

The splice\_countdown field is data indicating the number of packets necessary to reach an editable (spliceable) point at the transport stream packet level in transport stream packets with the same PID. Therefore, a transport stream packet at an editable splicing point has the splice\_countdown field set to "0". In a transport packet with the splice\_countdown field set to "0", the last byte of the transport stream packet payload can be spliced by relocating it to the last byte of an encoded picture.

In this regard, a splicing operation is performed to concatenate two different elementary streams at the transport level to form a new transport stream. Splicing operations can be divided into two types: a seamless splice with no discontinuity of decoding and a nonseamless splice with a discontinuity of decoding. The case where no discontinuity of decoding occurs means that the decoding time for an access unit of a newly added stream is consistent with the decoding time for an access unit of an old stream before splicing. On the contrary, the case where a discontinuity of decoding occurs means that the decoding time for an access unit of a newly added stream is inconsistent with the decoding time for an access unit of an old stream before splicing.

The transport\_private\_data\_length field is data

indicating the number of bytes of private data in an adaptation field.

The `private_data` is a field which is not required specifically by the standard but can be used to describe certain user data in an adaptation field.

The `adaptation_field_extension_length` field is data indicating the length of adaptation field extension data in an adaptation field.

The `ltw_flag` (`legal_time_window_flag`) field is data indicating whether `ltw_offset` data showing an offset value of the display window exists in an adaptation field.

The `piecewise_rate_flag` field is data indicating whether `piecewise_rate` data exists in an adaptation field.

The `seamless_splice_flag` field is data indicating whether the splicing point is a normal splicing point or a seamless splicing point. When the `seamless_splice_flag` field is "0", it indicates that the splicing point is a normal splicing point; when the `seamless_splice_flag` field is "1", it indicates that the splicing point is a seamless splicing point. A normal splicing point means that the splicing point exists at a break in PES packets and that the splicing packet immediately preceding this splicing point ends at the access unit and the next transport packet with the same PID begins at the header of a PES packet. On the contrary, a seamless splicing point means that a splicing

point exists in the middle of a PES packet and that in order for the decoding time for an access unit of a newly added stream to be consistent with the decoding time for an access unit of an old stream before splicing, the characteristics of the old stream are partly used as those of the new stream.

Next, the multiplexer system 8 is described below in detail with reference to Figure 10. The multiplexer system 8 is a system which multiplexes a PAT packet, a PMT packet, a CAT packet, transport stream packets containing encoded elementary data, an EPG packet, ECM packets, and an EMM' packet to generate a transport stream.

Specifically, the multiplexer system 8 comprises a multiplexer controller 81 for controlling all circuits within the multiplexer system 8, an encryption block 82 for enciphering ECM packets supplied by the subscriber authorization system 3, FIFO buffers 841 through 843 for buffering PAT packets, PMT packets, and CAT packets supplied by the encoder/multiplexer system 9 as program specific information PSI, respectively, FIFO buffers 851 through 859 for buffering transport stream packets containing a plurality of programs, respectively, FIFO buffers 861 through 863 for buffering ECM packets, EMM packets, and EPG packets, respectively, an FIFO controller 83 for controlling the read/write operations of each FIFO buffer as well as for monitoring free area of each FIFO buffer, a multiplexing

circuit 87 for multiplexing transport stream packets supplied by the FIFO buffers to generate a multiplexed transport stream, and a scramble block 88 for scrambling data elements contained in a multiplexed transport stream packet.

The multiplexer controller 81 receives an EPG packet, an EMM' packet, ECM packets (ECM1 through ECM19), a PAT packet, a PMT packet, and a CAT packet from the encoder/multiplexer control unit 9 and supplies each packet to an appropriate circuit. The multiplexer controller 81 receives also a PID table from the encoder/multiplexer control unit 9 and supplies it to the scramble block 88.

The encryption block 82 is a block for enciphering scramble keys Ks contained in a plurality of ECM packets supplied by the subscriber authorization system 3 through the encoder/multiplexer control unit 9 and the multiplexer controller 81. The encryption block 82 has a RAM 821 for storing a work key table downloaded from the subscriber authorization system 3 before the encryption operation and an encrypter 822 for enciphering the scramble keys Ks contained in the ECMS based on work keys Kw.

Now, the encryption operation of the encryption block 82 is described below by explaining, by way of example, the case where a scramble key Ks1 for scrambling elementary data constituting the first program is to be enciphered. First,

002030"06060600

a work key number Kw\_No contained in an ECM packet ECM1 is supplied to the RAM 821. The RAM 821 stores a work key table downloaded from the subscriber authorization system, which shows the correspondence between work key numbers Kw\_No and work keys Kw. Since the work key number Kw\_No contained in the packet ECM1 is supplied to the RAM 821, a work key Kw corresponding to the supplied work key number Kw\_No is provided by the RAM 821. The encryption circuit 822 receives an ECM packet containing a scramble key Ks1 and also receives a work key Kw from the RAM 821. The encryption circuit 822 enciphers the scramble key Ks1 contained in the source ECM with the work key Kw and then generates an enciphered scramble key Ks1'. The encryption circuit 822 accumulates the enciphered scramble key Ks1' rather than the unenciphered scramble key Ks in the source ECM and provides as an enciphered ECM packet a transport stream packet containing the enciphered scramble key Ks1'. It should be appreciated that the encryption algorithm is the same as that used at the subscriber authorization system 3 for enciphering work keys Kw contained in EMM data, that is, the encryption algorithm CRYSP.

The encryption block 82 supplies to the scramble block 88 a scramble key Ks1 which is supplied as ECM data. It should be appreciated that the scramble key Ks1 to be supplied to the scramble block 88 has not been enciphered

with a work key Kw.

In the foregoing example, scramble keys Ks1 accumulated in the first ECM packet ECM are enciphered as described above but the encryption operations for other scramble keys Ks2 through Ks19 are performed identically. Therefore, enciphered ECM packets ECM1' through ECM19' are provided by the encryption block 82 to the FIFO buffer 861 and unenciphered scramble keys Ks1 through Ks19 are also provided by the encryption block 82 to the scramble block 88.

The multiplexing circuit 87 supplies to the scramble block 88 some packets selected from PAT packets, PMT packets, and CAT packets buffered in the FIFO 841 through 843, transport stream packets containing a plurality of programs Program 1 through Program 9 buffered in the FIFO 851 through 859, and ECM packets, EMM packets, and EPG packets buffered in the FIFO 861 through 863, depending on the amount of data in each FIFO. In this regard, the FIFO controller 83 monitors the input rate for packet data supplied to each FIFO and it notifies the multiplexer controller 81 of an excess input rate condition when the sum of all input rates for each FIFO exceeds a predetermined output rate. Thus, the multiplexer controller 81 excludes the FIFO 862 for buffering EMM packets from the target FIFOs to be selected by the multiplexing circuit 87 and then switches the other FIFOs as a selection target to supply to the scramble block

88 packet data from a switched FIFO. Therefore, as the number of FIFOs to be selected by the multiplexing circuit 87 decreases, the number of select operations for a target FIFO increases and thereby the data output rate of each FIFO can be increased correspondingly to the excess input rate condition.

When the sum of all input rates for each FIFO is under a predetermined output rate, the multiplexer controller 81 supplies to the scramble block 88 EMM packets buffered in the FIFO 862 by restoring the FIFO 862 as a target FIFO to be selected by the multiplexing circuit 87. It should be appreciated that EMM data indicating the subscription information buffered in the FIFO 862 may not be changed frequently and substantially no disadvantageous situations will occur even if that FIFO is temporarily excluded from the target FIFOs to be selected by the multiplexing circuit 87.

When the sum of all input rates for each FIFO further increases to such an extent that only the exclusion of the single FIFO 862 from the target FIFOs to be selected by the multiplexing circuit 87 cannot deal with such an excess input rate condition, the multiplexer controller 81 excludes not only the FIFO 862 for buffering EMM data but the FIFO 863 for buffering EPG data. Such an additional exclusion can further decrease the number of FIFOs to be selected by

the multiplexing circuit 87 and further increase the number of select operations for a target FIFO and thereby the data output rate of each FIFO can be further increased correspondingly to the excess input rate condition. It should be appreciated that EPG data indicating the program guide information buffered in the FIFO 863 may not be changed frequently and substantially no disadvantageous situations will occur even if that FIFO is temporarily excluded from the target FIFOs to be selected by the multiplexing circuit 87.

The scramble block 88 has a PID detection circuit 881 and a scramble circuit 882. The PID detection circuit 881 receives transport stream packets from the multiplexing circuit 87 as well as a PID table (Figure 4) from the encoder/multiplexer control unit 9 through the multiplexer controller 81. Since the PID table shows the correspondence between PID values and scramble keys used in generating transport stream packets, the PID detection circuit 881 detects a desired scramble key Ks by referencing the PID values stored in the PID table and then supplies the detected scramble key Ks to the scramble circuit 882. The scramble circuit 882 uses the scramble key Ks supplied by the PID detection circuit 881 to scramble the transport stream packets containing program data associated with this scramble key Ks and provides an output to the modulation

circuit 10 (Figure 1).

Now, the program specific information is described below.

Program specific information (PSI: Program\_Specific\_Information) is information indicating which data is contained in which packet among the transport stream packets obtained by multiplexing a plurality of programs and data. Therefore, a decoder can decode desired data by referencing this program specific information.

The program specific information can be classified into 4 table structures as shown in Figure 11. A program association table (PAT: Program\_Association\_Table) is a table for indicating specified program numbers and their corresponding program map table (PMT) PIDs. A program map table (PMT: Program\_Map\_Table) is a table for indicating PIDs of packets in which elements of a specified program are described. A network information table (NIT: Network\_Information\_Table) is a private table for indicating information which is to be used in transmitting network parameters but is not specifically required by any standard. A conditional access table (CAT: Conditional\_Access\_Table) is a table for assigning unique PIDs to EMM packets. In the following description, the program association table, the program map table, and the conditional access table are described in detail.

First, the program association table is described below with reference to Figures 12 and 13.

The program association table PAT is a table used to specify each transmitted program and the PID of a transport stream packet which specifies the content of the program. Specifically, the program association table PAT consists of the following: table\_id, section\_syntax\_indicator, section\_length, transport\_stream\_id, version\_number, current\_next\_indicator, section\_number, last\_section\_number, program\_number, network\_PID, and program\_map\_PID.

The table\_id shows a unique identification number assigned to each table as shown in Figure 14. The table\_id of the program association table PAT is "0x00", the table\_id of the conditional access table CAT is "0x01", and the table\_id of the program map table PMT is "0x02".

The section\_syntax\_indicator is a constant fixed to "1".

The section\_length is a field for indicating in bytes the length from the bit following this section\_length to the last byte of the CRC section.

The transport\_stream\_id is identification data for discriminating between this transport stream and other transport streams multiplexed in the network.

The version\_number is data for indicating the version number of the program association table (PAT). The version number is an integer in the range 0 through 31 and

incremented by 1 when any setting in the program association table is changed, that is, any characteristic of a transport stream changes. The decoder at the receiver end references the version\_number to determine that only the section of the latest version is valid.

The current\_next\_indicator is data for indicating whether the transmitted program association table is currently available.

The section\_number is data for indicating the program association table section number. For example, the section\_number of the program\_association\_section() contained in the program association table is set to "0x00" to show that it is the first section.

The last\_section\_number is data for indicating the section number of the last section among all the sections specified in the program association table. Therefore, the last\_section\_number allows the system to know the number of sections specified in the program association table.

The program\_number is a unique number given to each of a plurality of programs to be multiplexed. For example, in a data transmission device according to the present invention, the program numbers 1 through 9 are assigned to 9 programs to be multiplexed, respectively. The program\_number is data which can be defined by the user arbitrarily. However, when the program\_number is set to 0,

the program\_number indicates that a network information table (NIT) exists in the stream.

The network\_PID is data for indicating the PID in which a network information table (NIT) in the stream is described. The network information table (NIT) is a table which can be set by the user arbitrarily and is not used for the present device.

The program\_map\_PID is data for indicating the PID of a transport stream packet having a program map table applied to the program specified by the program\_number. For example, if a program consists of a piece of video data and 4 pieces of audio data, a PID which specifies a transport stream packet having the video data of that program and 4 PIDs which specify transport stream packets having the audio data of that program are described in the program association table.

Next, the program map table (PMT) is described below with reference to Figures 15 and 16.

The program map table is a table used to show the mapping between program numbers and data elements constituting those programs. That is, the program map table is a section to specify, for each program number, PIDs of transport stream packets to transmit elements such as video data, audio data, and other additional data constituting that program. Specifically, the program map table consists

of the following: table\_id, section\_syntax\_indicator, section\_length, program\_number, version\_number, current\_next\_indicator, section\_number, last\_section\_number, PCR\_PID, program\_info\_length, descriptor(), stream\_type, elementary\_PID, ES\_info\_length, and descriptor().

The table\_id shows a unique identification number assigned to identify each table. The table\_id of the program map table is "0x02".

The section\_syntax\_indicator is a constant fixed to "1".

The section\_length is a field for indicating in bytes the length from the bit following this section\_length to the last byte of the CRC section.

The program\_number is a unique number given to each of a plurality of programs to be multiplexed. For example, in a data transmission device according to the present invention, the program numbers 1 through 9 are assigned to 9 programs to be multiplexed, respectively.

The version\_number is data for indicating the version number of a program map section which constitutes the program map table. The version number is incremented when data transmitted in the program map section is changed.

The current\_next\_indicator is data for indicating whether the transmitted program association table is currently available. If the program association table is currently available, the current\_next\_indicator is set to

"1"; if the program association table is not currently available, the current\_next\_indicator is set to "0".

The section\_number is data for indicating the number of a section contained in the program map table and it is always set to "0x00" because only one program map section exists to constitute the program map table.

The last\_section\_number is data for indicating the section number of the last section among all the sections specified in the program map table. Therefore, the last\_section\_number is always set to "0x00" in the program map section which constitutes the program map table.

The PCR\_PID is data for indicating the PID of a transport packet containing PCR data which is valid for a program specified by the program\_number.

The program\_info\_length is data for specifying the number of bytes for the descriptor() described following the program\_info\_length field.

The descriptor() is a data structure used to expand the definitions of programs and program elements. Various descriptors may be possible, for example, video\_stream\_descriptor() to describe basic information which identifies encoding parameters for video elementary streams; audio\_stream\_descriptor() to describe basic information which identifies an encoding version for audio elementary streams; hierarchy\_descriptor() to describe

information which identifies program elements containing hierarchically-encoded video and audio data multiplexed into a plurality of streams; registration\_descriptor() to describe information which identifies private data uniquely and definitely; data\_stream\_alignment\_descriptor() to describe the alignment type which exists between elementary streams associated with each other; target\_background\_descriptor to describe information which specifies a background window to be displayed in the background of the display window for transmitted video data; video\_window\_descriptor to describe information which specifies the display position of the display window for transmitted video data; CA\_descriptor() to describe a subscription information EMM, a program decryption information ECM, and other data; language\_descriptor() to describe information which identifies a language and the language used by associated program elements; system\_clock\_descriptor() to transmit information for the system clock used for generation of time stamps; multiplex\_buffer\_utilization\_descriptor() to describe data which indicates the critical levels of underflow and overflow of data occupancy in the STD (system\_target\_decoder) multiplex buffer containing the video\_buffer\_verifier; copyright\_descriptor() to describe information which allows identification of audio/visual

works to protect the copyrights thereof;  
maximum\_bitrate\_descriptor() to describe information which specifies the maximum bit rate for transmitted data elements; private\_data\_indicator\_descriptor() to specify transmission of private data; smoothing\_buffer\_descriptor() to describe information for the size of a smoothing buffer and the leak rate of output from that buffer; STD\_descriptor() to specify the leak value of an STD buffer; and ibp\_descriptor() to describe information for encoding types.

It should be appreciated that in a data transmission device according to the present invention, a data structure of descriptor() used in the program map table is intended to describe information which specifies the PID of a transport stream packet containing a program decryption information ECM.

The stream\_type is data for specifying the type of a program element contained in a packet with the PID specified by the elementary\_PID described below. For example, the stream\_type is set to "0x01" if a program element contained in the packet is video data conformable to the ISO/IEC11172 standard, it is set to "0x02" if a program element is video data conformable to the ISO/IEC13818-2 standard, it is set to "0x03" if a program element is audio data conformable to the ISO/IEC11172 standard, and it is set to "0x04" if a

program element is audio data conformable to the ISO/IEC13818-3 standard. In the program map section, the stream\_type is repeated as many times as the number of elements constituting a program specified by the program\_number.

The elementary\_PID is a field for specifying the PID of a transport stream packet which transmits elements constituting a program specified by the program\_number. The elementary\_PID is data described correspondingly to the stream\_type which indicates the type of a stream element.

The ES\_info\_length is data for specifying the number of bytes of a descriptor described following the ES\_info\_length field.

Next, the conditional access table (CAT) is described below in detail with reference to Figures 17 and 18. The conditional access table is a section for specifying the PID of a packet which transmits subscription information EMMs used to descramble video data and audio data in a pay broadcast system. The conditional access table is also a section for specifying the relationship between a conditional access system (CA system: Conditional Access System) which allows only subscribers to descramble programs and a subscription information EMM.

The PID of the conditional access table is not specified by the program association table like the program

map table and therefore, each field of the conditional access table can be decoded by finding the unique PID value "0x01" assigned to the conditional access table from bit streams.

Specifically, the conditional access table consists of the following: table\_id, section\_syntax\_indicator, section\_length, version\_number, current\_next\_indicator, section\_number, last\_section\_number, and descriptor().

The table\_id shows a unique identification number assigned to each table and the table\_id assigned to the conditional access table CAT is "0x01".

The section\_syntax\_indicator is a constant fixed to "1". The section\_length is a field for indicating in bytes the length from the bit following this section\_length to the last byte of the CRC section. The version\_number is data for indicating the version number of the conditional access table (CAT). The version\_number is incremented by 1 when any setting of the conditional access table is changed. The current\_next\_indicator is data for indicating whether the transmitted conditional access table is currently available. If the conditional access table is currently available, the current\_next\_indicator is set to "1"; if the conditional access table is not currently available, the current\_next\_indicator is set to "0".

The section\_number is data for indicating the section

number of the conditional access table. For example, the CA\_section() field contained in the conditional access table is set to "0x00" to indicate that it is the first section. The section\_number is incremented by 1 each time the sections contained in the conditional access table increase.

The last\_section\_number is data for indicating the section number of the last section among all the sections specified in the conditional access table.

As described above, the descriptor() is a data structure used to expand the definitions of programs and program elements. It should be appreciated that in a data transmission device according to the present invention, a data structure of descriptor() used in the conditional access table is intended to describe information which specifies the PID of a transport stream packet containing a subscription information EMM.

Next, the conditional access descriptor CA\_descriptor() used in the program map table and the conditional access table is described below with reference to Figure 19.

The conditional access descriptor is used to specify a subscription information EMM containing personal information on subscription and a work key Kw to decipher enciphered ECM data as well as a program decryption information ECM containing a scramble key Ks to descramble elementary streams such as video and audio. Therefore, if elementary

streams such as video and audio are scrambled, the conditional access descriptor always exists in the bit streams.

The conditional access descriptor CA\_descriptor() consists of the following data: descriptor\_tag, descriptor\_length, CA\_system\_ID, CA\_PID, and private\_data\_byte. The descriptor\_tag is a unique identification tag for identifying each of a plurality of descriptors as described above. The conditional access descriptor CA\_descriptor() has a descriptor\_tag of "9" assigned thereto. The descriptor\_length is data for specifying the number of data bytes of a descriptor immediately following the descriptor\_length. The CA\_system\_ID is data for indicating the type of a conditional access system (CA system) which generates and applies associated ECM or EMM data. The CA\_PID indicates the PID of a transport stream containing ECM or EMM data on a conditional access system (CA system) specified by the CA\_system\_ID.

The data contents described in a packet specified by the CA\_PID of the conditional access descriptor CA\_descriptor() may vary from context to context of the CA\_descriptor(). With reference to Figure 20, a packet specified by the CA\_PID is described below.

It should be appreciated first that the data contents

described in a packet specified by the CA\_PID may vary with the usage of the CA\_descriptor(), that is, whether the CA\_descriptor() is used in the conditional access table CAT or in the program map table. Specifically, if the CA\_descriptor() exists in the conditional access table, the CA\_PID indicates a transport stream packet containing EMM data. If the CA\_descriptor() exists in the program map table, the CA\_PID indicates a transport stream packet containing ECM data.

In addition, the data contents described in a packet specified by the CA\_PID may also vary with the context in the program map table of the conditional access descriptor CA\_descriptor(). In this regard, the context in the program map table of the conditional access descriptor CA\_descriptor() means whether the CA\_descriptor() is used in the first FOR statement (Figure 15) or in the second FOR statement (Figure 15).

If the conditional access descriptor CA\_descriptor() is used in the first FOR statement, the CA\_PID indicates the PID of a transport stream packet containing ECM data. The first CA\_descriptor() for this case is used according to the syntax for describing the correspondence between a transport stream packet containing a program specified by the program\_number and a transport stream packet containing ECM data. That is, the same ECM data has been assigned to all

data elements contained in the program specified by the program\_number. In other words, all data elements in the program have been scrambled and descrambled with the same scramble key.

On the contrary, if the conditional access descriptor CA\_descriptor() is used in the second FOR statement as the second CA\_descriptor(), the CA\_PID also indicates the PID of a transport stream packet containing ECM data. However, the second CA\_descriptor() is not intended to describe the correspondence between a transport stream packet containing a program specified by the program\_number and a transport stream packet containing ECM data but this CA\_descriptor() describes the correspondence between a transport stream packet containing data elements specified by the elementary\_PID and a transport stream packet containing ECM data. That is, different ECM data has been assigned to each data element specified by the elementary\_PID. In other words, different data elements in the program have been scrambled and descrambled with different scramble keys. When it is assumed that a program consists of a channel of video data and two channels, that is, main audio and subaudio, of audio data, using different scramble keys for each data element in such a manner may allow the system to scramble the subaudio data with a different scramble key from those for other channels.

Next, EMM data and ECM data are described below.

EMM (Entitlement Management Message) data is data which contains subscription information indicating programs subscribed for by a subscriber and a work key Kw used to encipher a scramble key Ks. EMM data is transmitted in the payload of a transport stream packet like the program association table PAT, the program map table PMT, and the conditional access table CAT. In the following description, a transport stream packet containing EMM data will be referred to as an EMM packet.

As shown in Figure 21, an EMM packet consists of a header of 4 bytes and a payload section of 183 bytes. Like a transport stream packet as described above, the header of an EMM packet consists of the following data fields: sync\_byte, transport\_error\_indicator, payload\_unit\_start\_indicator, transport\_priority, PID, transport\_scrambling\_control, adaptation\_field\_control, and continuity\_counter. The payload section of 183 bytes consists of an EMM section header, EMM data, CRC, and stuffing bytes.

The EMM section header consists of the following data fields: table\_id, section\_syntax\_indicator, reserved\_0, reserved\_1, section\_length, table\_id\_extention, reserved\_2, version\_number, current\_next\_indicator, section\_number, and last\_section\_number. The table\_id is a unique

identification number assigned to each table (each section). The EMM section has user-definable table\_id "0x40" through "0xFE" assigned as identification numbers. The section\_syntax\_indicator is a constant fixed to "1". The section\_length is a data field for indicating in bytes the length from the bit following this section\_length to the last byte of the CRC section. The table\_id\_extention is data for indicating whether there is any extension data of the EMM section. The version\_number is data for indicating the version number of the EMM section. The version number is incremented when any parameter of the EMM section changes in a transport stream. The current\_next\_indicator is data for indicating whether the transmitted EMM section is currently available. The section\_number is data for indicating the number of the EMM section and it is always "1". The last\_section\_number is data for indicating the section number of the last section in the EMM section and it is always "1".

The EMM data consists of the following data fields: card\_ID, EMM\_type, CA\_system\_ID, Kw\_No, Kw, authorize\_type, service\_ID, series\_ID, event\_ID, and component\_map.

The card\_ID is an identification number given to a unique IC card mounted on the IRD and it is also used as an identification number for management of its subscriber. The EMM\_type is data for indicating the type of EMM data. The

CA\_system\_ID is an identification number given to a CA system containing a subscriber management system. The Kw indicates a work key used to encipher a scramble key Ks and the Kw\_No is a number for indicating which work key among 256 predefined work keys Kw was used to encipher the scramble key Ks. The authorize\_type, the service\_ID, the series\_ID, and the event\_ID are subscription conditions for indicating which program is subscribed for by a subscriber. The component\_map is data for indicating which element of the subscribed program is subscribed for.

ECM (Entitlement\_Control\_Message) data is data which contains scramble keys Ks used to descramble the scrambled programs subscribed for by a subscriber. ECM data is transmitted in the payload of a transport stream packet like the program association table PAT, the program map table PMT, and the conditional access table CAT. In the following description, a transport stream packet containing ECM data will be referred to as an ECM packet. ECM packets will be transmitted at intervals of approximately 100 msec and scramble keys transmitted as EMM data will be updated at intervals of approximately 4 sec.

As shown in Figure 22, an ECM packet consists of a header of 4 bytes and a payload section of 183 bytes. Like a transport stream packet as described above, the header of an ECM packet consists of the following data fields:

sync\_byte, transport\_error\_indicator,  
payload\_unit\_start\_indicator, transport\_priority, PID,  
transport\_scrambling\_control, adaptation\_field\_control, and  
continuity\_counter. The payload section of 183 bytes  
consists of an ECM section header, ECM data, CRC, and  
stuffing bytes.

The ECM section header consists of the following data  
fields: table\_id, section\_syntax\_indicator, reserved\_0,  
reserved\_1, section\_length, table\_id\_extention, reserved\_2,  
version\_number, current\_next\_indicator, section\_number, and  
last\_section\_number. The table\_id is a unique  
identification number assigned to each table (each section).  
The ECM section has user-definable table\_id "0x40" through  
"0xFE" assigned as identification numbers. The  
section\_syntax\_indicator is a constant fixed to "1". The  
section\_length is a data field for indicating in bytes the  
length from the bit following this section\_length to the  
last byte of the CRC section. The table\_id\_extention is  
data for indicating whether there is any extension data of  
the ECM section. The version\_number is data for indicating  
the version number of the ECM section. The version number  
is incremented when any parameter of the ECM section changes  
in a transport stream. The current\_next\_indicator is data  
for indicating whether the transmitted ECM section is  
currently available. The section\_number is data for

indicating the number of the ECM section and it is always "1". The last\_section\_number is data for indicating the section number of the last section in the ECM section and it is always "1".

The ECM data consists of the following data fields: ECM\_type, CA\_system\_ID, Kw\_No, service\_mode, service\_ID, series\_ID, event\_ID, component\_map, Ks\_Odd, and Ks\_Even.

The ECM\_type is data for indicating the type of ECM data. The CA\_system\_ID is an identification number given to a CA system containing a subscriber management system. The Kw\_No is a number for indicating which work key among 256 predefined work keys Kw was used to encipher a scramble key Ks. The service\_mode, the service\_ID, the series\_ID, and the event\_ID are subscription conditions for indicating which program is subscribed for by a subscriber. The component\_map is data for indicating which element of the subscribed program is subscribed for. The Ks\_Odd and the Ks\_Even are scramble keys used to scramble transmitted video and audio data. The scramble keys consist of the odd keys Ks\_Odd and the even keys Ks\_Even and the odd keys and the even keys are alternately used as scramble keys at intervals of 4 sec.

Next, the IRD (Integrated\_Receiver\_Decoder) 20 provided as a receiver is described below in detail with reference to Figure 23.



the program\_number and the program\_map\_PID contained in the PAT packet. The PAT analyzer 231 also receives from the security module 24 the authorize\_type indicating which program is subscribed for by a subscriber. Then the PAT analyzer 231 compares the authorize\_type supplied by the security module with the program\_number supplied by the demultiplexer 22 and selects only the program\_map\_PID corresponding to the program\_number which is consistent with the program subscribed for by the subscriber. Thus, the PAT analyzer 231 can obtain only the PID of a program map table corresponding to that program.

Then the demultiplexer 22 selects a transport stream packet with the PID specified by the program\_map\_PID supplied by the PAT analyzer 231 to provide the selected transport stream packet to the PMT analyzer 232 as a PMT packet.

The PMT analyzer 232 analyzes PMT data contained in a PMT packet with the PID specified by the program\_map\_PID. Specifically, the PMT analyzer 232 obtains from the elementary\_PID described as PMT data in the PMT packet the PID of a transport stream packet containing data elements which constitute a program specified by the program\_number. For example, assuming that a program consists of two data elements, that is, video data and audio data, the first elementary\_PID will specify a transport stream packet

containing a video stream and the second elementary\_PID will specify another transport stream packet containing an audio stream.

In addition, the PMT analyzer 232 references the CA\_descriptor described in PMT data as a descriptor() function. Then the PMT analyzer 232 obtains the CA\_PID described in the CA\_descriptor and feeds back this CA\_PID to the demultiplexer 22. The CA\_PID described in the CA\_descriptor is data for indicating the PID of a transport stream packet containing ECM data.

Then the demultiplexer 22 provides a transport stream packet with the PID specified by the elementary\_PID supplied by the PMT analyzer 232 to an appropriate processing circuit. For example, if the data element is a video stream, it is provided to the descrambler 25V for descrambling video streams; if the data element is an audio stream, it is provided to the descrambler 25A for descrambling audio streams; if the data element is a private data stream, it is provided to the descrambler 25P for descrambling private data streams.

In addition, the demultiplexer 22 supplies a transport stream packet with the PID specified by the CA\_PID to the ECM analyzer 235 as an ECM packet. Thus, the ECM data supplied to the ECM analyzer 235 contains only ECM data concerning a program subscribed for by a subscriber.

The ECM analyzer 235 first filters an ECM' packet received from the demultiplexer 22. Specifically, the ECM analyzer 235 compares the CA\_system\_ID in the ECM data with the CA\_system\_ID supplied by the security module 24 and selects only an ECM packet containing the CA\_system\_ID which matches the CA\_system\_ID supplied by the security module 24. Then the ECM analyzer 235 can obtain enciphered scramble keys Ks' by analyzing ECM data contained in the selected ECM packet. The ECM analyzer 235 supplies the enciphered scramble keys Ks' to a decryption circuit 242 in a microprocessor MPU of the security module 24.

The demultiplexer 22 detects a transport stream packet with the PID of a CAT packet from a transmitted bit stream and provides the detected transport stream packet to the CAT analyzer 233 as a CAT packet.

The CAT analyzer 233 detects a CA\_descriptor() function contained in the CAT packet received from the demultiplexer 22 and obtains the PID of a transport stream packet specified by the CA\_descriptor() of the CAT packet from the CA\_PID in the CA\_descriptor() function. The transport stream packet specified by the CA\_descriptor() of the CAT packet is a transport stream packet containing EMM information.

The demultiplexer 22 selects a transport stream packet with the PID specified by the CA\_PID received from the CAT

analyzer 233 from a transmitted bit stream and supplies the selected transport stream packet to the EMM analyzer 234 as an EMM' packet.

The EMM analyzer 234 first filters an EMM' packet received from the demultiplexer 22 and selects only an EMM' packet corresponding to the security module. Specifically, EMM data contained in an EMM' packet can be obtained by referencing the CA\_PID, because a transport stream packet specified by the CA\_PID of the CA\_descriptor() for the EMM packet received from the demultiplexer 22 is an EMM' packet containing EMM data. The EMM analyzer 234 compares the Card\_ID and the CA\_system\_ID in the EMM data with the Card\_ID and the CA\_system\_ID supplied by a memory 241 of the security module 24 and selects only an EMM' packet containing the Card\_ID and the CA\_system\_ID which match the Card\_ID and the CA\_system\_ID supplied by the security module 24, respectively.

Then the EMM analyzer 234 supplies EMM data of 101 bytes contained in the selected EMM packet to the memory 241 of the security module 24 as the latest EMM data to replace old EMM data in the memory 241. In addition, the EMM analyzer 234 supplies an enciphered work key Kw' contained in the EMM data to the decryption circuit 242 in the microprocessor MPU of the security module 24.

The security module 24 consists of the memory 241 and

the microprocessor comprising the first decryption circuit 242 and the second decryption circuit 243. The security module 24 is composed of, for example, an IC card which is removable from the IRD.

The first decryption circuit 242 of the security module 24 receives an enciphered work key  $Kw'$  from the EMM analyzer 234 to decipher the enciphered work key  $Kw'$  with a prestored master key  $Km$ . Then the first decryption circuit 242 supplies the deciphered work key  $Kw$  to the second decryption circuit 243.

The second decryption circuit 243 of the security module 24 receives an enciphered scramble key  $Ks'$  from the ECM circuit 235 as well as the deciphered work key  $Kw$  from the first decryption circuit 242 to decipher the enciphered scramble key  $Ks'$  with the deciphered work key  $Kw$ . The deciphered scramble key  $Ks$  is supplied to the descramblers 25V, 25A, and 25P. It should be appreciated that in the foregoing, the same scramble key  $Ks$  is supplied to the descramblers 25V, 25A, and 25P but different scramble keys  $Ks$  may be supplied to different descramblers if a different scramble key  $Ks$  is defined for each data element.

From the foregoing, in a data multiplexing device of such a configuration that transport stream packets of program data which consists of a plurality of data elements are multiplexed and transmitted, a scramble key

corresponding to one or more data elements among a plurality of data elements constituting a program is generated and then each data element is scrambled, thereby each data element can be subscribed for by a subscriber.

Since each of multiplexed transport stream packets is scrambled with its corresponding scramble key, the circuit configuration for scrambling can be made simpler than that for scrambling each transport stream packet before multiplexing.

Any overflow from a buffer memory for buffering higher priority data elements can be avoided by switchably controlling a switch means to exclude a buffer memory for buffering lower priority information among a plurality of buffer memories, when the input rate for a data element supplied to each buffer memory is higher than a reference rate.

At the receiver end, different data elements can be descrambled separately by descrambling with a scramble key the transport stream packets of each data element corresponding to that scramble key.

According to the above-mentioned configuration, a data multiplexing device which allows a subscriber to watch and/or hear desired data elements only can be achieved by a simpler implementation.

Moreover, any overflow from a buffer memory can be

avoided effectively by excluding lower priority data elements from the selections and multiplexing desired data elements in preference to others.

#### Industrial Applicability

The present invention is applicable to a digital broadcast system which performs compression-coding of video data and audio data according to the MPEG2 and transmits the coded streams over a ground wave or a satellite wave.

## CLAIMS

1. A data multiplexing device which multiplexes and transmits transport stream packets of program data consisting of a plurality of data elements constructed in the form of transport stream packets, said device comprising:

a scramble key generation means for generating a scramble key corresponding to each of said data elements, and

a scramble means for scrambling said corresponding transport stream packet of data element by using a scramble key generated by said scramble key generation means.

2. A data multiplexing device according to claim 1, wherein said scramble key generation means generates a scramble key corresponding to one or more data elements among said plurality of data elements constituting said program.

3. A data multiplexing device according to claim 1, wherein said plurality of data elements constituting said program are video data, main audio data, subaudio data, and private data.

4. A data multiplexing device according to claim 1, wherein said scramble means scrambles each of said multiplexed transport stream packets by using said scramble key corresponding to said transport stream packet.

5. A data multiplexing device according to claim 4, wherein said scramble means searches for each scramble key for scrambling said transport stream packet by using a correspondence table which shows packet identification codes for said transport stream packets and their corresponding scramble keys.

6. A data multiplexing device according to claim 4, wherein said data multiplexing device comprises a first encryption means for enciphering said scramble key with a work key and multiplexes said enciphered scramble key with said transport stream packet to transmit it.

7. A data multiplexing device according to claim 6, wherein said data multiplexing device comprises a second encryption means for enciphering said work key with a master key and multiplexes said enciphered work key with said transport stream packet to transmit it.

8. A data multiplexing device comprising:

a plurality of buffer memories which store a plurality of packet data strings constituting a plurality of data elements,

a multiplexing means which has a switch means for switching said buffer memories and which time-division multiplexes said plurality of packet data strings to provide an output by sequentially time-division switching said buffer memories with said switch means, and

a switch control means which selects, according to an input rate for said packet data strings, said plurality of buffer memories switchable by said switch means.

9. A data multiplexing device according to claim 8, wherein said switch control means switchably controls said switch means to exclude a buffer memory for buffering lower priority information among said plurality of buffer memories, when said input rate is higher than a reference rate.

10. A data multiplexing device according to claim 9, wherein said switch control means determines packet data containing EMM data to be lower priority information and excludes a buffer memory for buffering said packet data containing said EMM data among said switchable buffer memories.

11. A data multiplexing device according to claim 10, wherein said switch control means excludes, in addition to said buffer memory for buffering said packet data containing said EMM data, a buffer memory for buffering packet data containing EPG data among said switchable buffer memories, when said input rate is still higher than said reference rate after said buffer memory for buffering said packet data containing said EMM data has been excluded.

12. A program distribution system for distributing a program consisting of a plurality of data elements, said program distribution system comprising:

a subscriber management system for managing subscribers' subscriptions for each program or data element,

a subscriber authorization system for generating a scramble key to be used for descrambling said data elements contained in said program for each of said data elements, and

a multiplexer system comprising:

an encoding system for encoding each of said data elements contained in said program to generate encoded streams consisting of encoded data elements for each program,

a multiplexing means for multiplexing said encoded streams generated for each program by said encoding system, and

a scramble means for selectively scrambling each of said encoded data elements contained in said multiplexed stream based on said scramble key generated by said subscriber authorization system.

13. A program distribution system according to claim 12, wherein said subscriber management system generates a work key for enciphering said scramble key, and

said subscriber management system supplies to said subscriber authorization system a subscriber identification number for identifying said subscriber and said work key as EMM data.

14. A program distribution system according to claim 13, wherein said subscriber authorization system comprises a first encryption means for enciphering said work key supplied as said EMM data with a master key to provide an enciphered work key as an output.

15. A program distribution system according to claim 14, wherein said subscriber authorization system supplies to said multiplexer system said enciphered work key enciphered by said first encryption means and said subscriber identification number as enciphered EMM data.

16. A program distribution system according to claim 15, wherein said subscriber authorization system supplies to said multiplexer system a work key identification number for identifying said enciphered work key enciphered by said first encryption means and said scramble key as ECM data.

17. A program distribution system according to claim 16, wherein said subscriber authorization system comprises a work key table which shows the correspondence between said work key and a work key identification number for identifying said work key, and

said subscriber authorization system supplies said work key table to said multiplexer system.

18. A program distribution system according to claim 17, wherein said multiplexer system comprises a second encryption means for enciphering said scramble key contained in said ECM data with said work key to provide an enciphered scramble key as an output.

19. A program distribution system according to claim 18, wherein said work key used by said second encryption means for enciphering said scramble key is not said enciphered work key contained in said EMM data but an unenciphered work key obtained from said work key table supplied by said

subscriber authorization system.

20. A program distribution system according to claim 19, wherein said second encryption means obtains a work key from said work key identification number contained in said ECM data by referencing said work key table supplied by said subscriber authorization system,

said second encryption means enciphers said scramble key contained in said ECM data by using said work key obtained from said work key table, and

said second encryption means provides said enciphered scramble key enciphered by said second encryption means as enciphered ECM data.

21. A program distribution system according to claim 20, wherein said encoded stream provided by said encoding system and said enciphered EMM data and ECM data provided by said subscriber authorization system are provided in the form of transport stream packets and each of said transport stream packets is given a packet ID for identifying said transport stream packet.

22. A program distribution system according to claim 21, wherein said multiplexer system further comprises a second encryption means for enciphering said scramble key contained

in said ECM data to provide enciphered ECM data as an output to said multiplexing means.

23. A program distribution system according to claim 22, wherein said scramble means does not scramble said enciphered EMM data and said enciphered ECM data but scrambles only said plurality of data elements constituting said program.

24. A program distribution system according to claim 22, wherein said scramble means scrambles said data elements by using scramble keys associated with said data elements based on a table which shows the correspondence between the packet ID of a transport stream packet containing each of said data elements and a scramble key defined for said data element.

25. A program distribution system according to claim 22, wherein said scramble means detects the packet IDs of all transport stream packets supplied by said multiplexing means to said scramble means,

said scramble means determines whether scramble keys are defined for said detected packet IDs based on a table which shows the correspondence between said packet IDs and said scramble keys,

if some scramble keys are defined for said packet IDs,

said scramble means scrambles data elements contained in transport stream packets indicated by said packet IDs with said defined scramble keys, and

if no scramble keys are defined for said packet IDs, said scramble means does not scramble data contained in transport stream packets indicated by said packet IDs.

26. A program distribution system according to claim 20, wherein said multiplexer system further comprises a second encryption means for enciphering said scramble key contained in said ECM data and a buffer means for buffering data supplied to said multiplexer system in the form of transport stream packets and for providing said transport stream packets to said multiplexing means.

27. A program distribution system according to claim 26, wherein said multiplexer system monitors free area of a plurality of buffers for buffering said transport stream packets containing said data elements, and

if any of said plurality of buffers for buffering said transport stream packets containing said data elements is likely to overflow, said transport stream packets containing said EMM data are not provided to said multiplexing means by a buffer for buffering said transport stream packets containing said EMM data and instead, said transport stream

packets containing said data elements are provided to said multiplexing means by said buffer likely to overflow.

28. A program distribution system according to claim 20, further comprising:

a distribution system for distributing transport streams provided by said multiplexer system to the receiving end through a transmission line, and

a reception system for receiving said transport streams transmitted through said transmission line.

29. A program distribution system according to claim 28, wherein said reception system comprises:

a demultiplexer for demultiplexing said transmitted transport streams,

a descrambler for descrambling said scrambled data elements with said supplied scramble keys, respectively,

a decoder for decoding said descrambled data for each data element,

a CPU for analyzing transport stream packets constituting said transport stream, and

a security module for deciphering said enciphered scramble key contained in said transport stream and supplying said deciphered scramble key to said descrambler.

30. A program distribution system according to claim 29, wherein said security module comprises:

a memory means for storing a subscriber's subscription information contained in said enciphered EMM data contained in said transmitted transport stream,

a first decryption means for receiving said enciphered work key contained in said transmitted transport stream as well as the same master key as that used by said subscriber management system to decipher said enciphered work key with said master key, and

a second decryption means for receiving said enciphered scramble key contained in said transport stream as well as said deciphered work key supplied by said first decryption means to decipher said enciphered scramble key with said deciphered work key.

31. A program distribution system according to claim 30, wherein said CPU filters, from said transport stream packets containing said enciphered ECM data supplied by said demultiplexer, only a transport stream packet having enciphered ECM data on a program or data element subscribed for by a subscriber, and

said CPU obtains said enciphered scramble key from said enciphered ECM data by analyzing said enciphered ECM data contained in said filtered transport stream packet.

32. A program distribution system according to claim 31, wherein if an enciphered scramble key associated with said program is supplied by said CPU, said security module deciphers said supplied enciphered scramble key to supply the same scramble key to a plurality of descramblers corresponding to a plurality of data elements constituting said program, respectively, and

if a plurality of enciphered scramble keys associated with said plurality of data elements are supplied by said CPU, said security module deciphers said plurality of supplied enciphered scramble keys, respectively, to supply different scramble keys to a plurality of descramblers corresponding to subscribed data elements among said plurality of data elements.

33. A program distribution system according to claim 12, wherein said subscriber authorization system comprises a first encryption means for enciphering with a master key a work key used for enciphering said scramble key,

said subscriber authorization system supplies to said multiplexer system said enciphered work key enciphered by said first encryption means and a subscriber identification number for identifying said subscriber as enciphered EMM data, and

said subscriber authorization system supplies to said multiplexer system a work key identification number for identifying said enciphered work key enciphered by said encryption means and said scramble key as ECM data.

34. A program distribution system according to claim 33, comprising an encoder/multiplexer control system which generates a program specific information for indicating how to multiplex said plurality of programs, said plurality of data elements constituting said programs, said plurality of ECM data streams, and said plurality of EMM data streams, and controls said encoder system and said multiplexer system to multiplex said plurality of programs, said plurality of data elements, said plurality of ECM data streams, and said plurality of EMM data streams according to said generated program specific information.

35. A program distribution system according to claim 33, comprising an encoder/multiplexer control system which generates a program specific information for identifying the packet IDs of a transport stream packet containing said plurality of data elements constituting said program, a transport stream packet containing said ECM data, and a transport stream packet containing said EMM data within a transport stream provided by said data distribution system,

and

which controls said encoder system and said multiplexer system to multiplex said transport stream packet containing said plurality of data elements constituting said program, said transport stream packet containing said ECM data, and said transport stream packet containing said EMM data according to said program specific information.

36. A program distribution system according to claim 34, wherein said encoder system supplies to said multiplexer system said encoded data elements as elementary packets in the form of transport stream packets,

said subscriber authorization system supplies to said multiplexer system said enciphered EMM data and said ECM data as enciphered EMM packets and ECM packets in the form of transport stream packets, respectively, and

said encoder/multiplexer control system supplies to said multiplexer system said program specific information as PSI packets in the form of transport stream packets.

37. A program distribution system according to claim 36, wherein said multiplexer system further comprises, previous to said multiplexing means, a second encryption means for enciphering a scramble key contained in said ECM data.

38. A program distribution system according to claim 37, wherein said subscriber authorization system supplies to said second encryption means of said multiplexer system a work key table which shows the correspondence between said work key and a work key identification number for identifying said work key.

39. A program distribution system according to claim 38, wherein said second encryption means obtains a work key from said work key identification number contained in said ECM data by referencing said work key table,

said second encryption means enciphers said scramble key contained in said ECM data by using said work key obtained from said work key table, and

said second encryption means supplies to said multiplexing means said enciphered scramble key enciphered by said second encryption means as enciphered ECM data.

40. A program distribution system according to claim 39, wherein said encoder/multiplexer control system assigns to all transport stream packets supplied to said multiplexer system in the form of transport stream packets, packet IDs for identifying said transport stream packets.

41. A program distribution system according to claim 40,

wherein said program specific information consists of at least a program association table, a program map table, and a conditional access table.

42. A program distribution system according to claim 41, wherein said encoder/multiplexer control system supplies to said multiplexer system a transport stream packet containing said program association table as a PAT packet,

said encoder/multiplexer control system supplies to said multiplexer system a transport stream packet containing said program map table as a PMT packet, and

said encoder/multiplexer control system supplies to said multiplexer system a transport stream packet containing said conditional access table as a CAT packet.

43. A program distribution system according to claim 42, wherein said program association table is a table for specifying a program number and the packet ID of a PMT packet corresponding to said program number,

said program map table is a table for specifying the packet ID of a transport stream packet containing each of a plurality of data elements constituting a program, and

said conditional access table is a table for specifying the packet ID of said enciphered EMM packet.

44. A program distribution system according to claim 43, wherein said program association table describes the program number for indicating a program and the packet ID of a PMT packet associated with said program, and

said program map table describes the program number for indicating said program, a plurality of packet IDs containing transport stream packets containing a plurality of data elements constituting said program, and a descriptor for specifying the packet ID of an enciphered ECM packet associated with said program or said data element.

45. A program distribution system according to claim 44, wherein if said descriptor in said program map table is described at a location corresponding to said program number, said descriptor specifies the packet ID of an ECM packet containing a scramble key for scrambling all data elements of said plurality of data elements constituting said program, and

if said descriptor in said program map table is described at a location corresponding to each of said data elements of said program, said descriptor specifies the packet IDs of a plurality of ECM packets containing a plurality of scramble keys for scrambling said plurality of data elements constituting said program, respectively.

46. A program distribution system according to claim 45, wherein if said program has a first data element through an n'th data element and the same scramble key is specified for said first data element through said n'th data element,

said program map table describes the correspondence between the program number for indicating said program and the packet IDs of ECM packets containing scramble keys for scrambling said first data element through said n'th data element, respectively.

47. A program distribution system according to claim 45, wherein if said program has a first data element through an n'th data element and at least one different scramble key is specified for said first data element through said n'th data element,

said program map table describes the correspondence between the packet ID of a transport stream packet containing said first data element and the packet ID of a transport stream packet containing ECM data containing a scramble key for scrambling said first data element, and

said program map table describes the correspondence between the packet ID of a transport stream packet containing said n'th data element and the packet ID of a transport stream packet containing ECM data containing a scramble key for scrambling said n'th data element.

48. A program distribution system according to claim 42, wherein said encoder/multiplexer control system specifies unique packet IDs for said program map table and said conditional access table.

49. A program distribution system according to claim 42, wherein said scramble means does not scramble said program specific information, said EMM data, and said ECM data but scrambles only said data elements.

50. A program distribution system according to claim 42, wherein said scramble means scrambles said data elements by using scramble keys specified for said data elements based on a table which shows the correspondence between the packet ID of a transport stream packet containing each of said data elements and a scramble key specified for said data element.

51. A program distribution system according to claim 42, wherein said encoder/multiplexer control system stores packet IDs used for previous operations so that repetitive assignment of a packet ID to a plurality of transport stream packets can be avoided when packet IDs are specified to identify said ECM packet, said EMM packet, said PSI packet, and said elementary packet, respectively.

52. A program distribution system according to claim 42, wherein said encoder/multiplexer control system generates a table which shows the correspondence between the packet ID assigned to each transport stream packet and a scramble key used for scrambling data contained in said transport stream packet, and

said encoder/multiplexer control system supplies to said multiplexer system said table for showing the correspondence between said packet IDs and said scramble keys.

53. A program distribution system according to claim 52, wherein said scramble means does not scramble said program specific information, said EMM data, and said ECM data but scrambles only said data elements by referencing said table for showing the correspondence between said packet IDs and said scramble keys.

54. A program distribution system according to claim 52, wherein said scramble means scrambles said data elements with scramble keys specified for said data elements by referencing said table for showing the correspondence between said packet IDs and said scramble keys.

55. A program distribution system according to claim 52, wherein said scramble means detects the packet IDs of all transport stream packets supplied by said multiplexing means to said scramble means,

said scramble means determines whether scramble keys are defined for said detected packet IDs based on said table which shows the correspondence between said packet IDs and said scramble keys,

if some scramble keys are defined for said packet IDs, said scramble means scrambles data elements contained in transport stream packets indicated by said packet IDs with said defined scramble keys, and

if no scramble keys are defined for said packet IDs, said scramble means does not scramble data contained in transport stream packets indicated by said packet IDs.

56. A program distribution system according to claim 36, wherein said multiplexer system further comprises:

a second encryption means for enciphering said scramble keys, and

a plurality of buffer means for buffering said PAT packets, said PMT packets, said CAT packets, said transport stream packets containing said data elements, said enciphered EMM packets, and said enciphered ECM packets, respectively, and for providing said transport stream

packets to said multiplexing means.

57. A program distribution system according to claim 56, wherein said multiplexer system monitors free area of a plurality of buffers for buffering said transport stream packets containing said data elements, and

if any of said plurality of buffers for buffering said transport stream packets containing said data elements is likely to overflow, said EMM packets are not provided to said multiplexing means by a buffer for buffering said EMM packets and instead, said transport stream packets containing said data elements are provided to said multiplexing means by said buffer likely to overflow.

58. A program distribution system according to claim 47, further comprising:

a distribution system for distributing transport streams provided by said multiplexer system to the receiving end through a transmission line, and

a reception system for receiving said transport streams transmitted through said transmission line.

59. A program distribution system according to claim 58, wherein said reception system comprises:

a demultiplexer for demultiplexing said transmitted

transport streams,

a descrambler for descrambling said scrambled data elements with said supplied scramble keys, respectively,

a decoder for decoding said descrambled data for each data element,

a CPU for analyzing transport stream packets constituting said transport stream, and

a security module for deciphering said enciphered scramble key contained in said transport stream and supplying said deciphered scramble key to said descrambler.

60. A program distribution system according to claim 59, wherein said CPU comprises:

a PAT analyzing means for analyzing a program association table contained in said transport stream,

a PMT analyzing means for analyzing a program map table contained in said transport stream,

a CAT analyzing means for analyzing a conditional access table contained in said transport stream,

an EMM analyzing means for analyzing enciphered EMM data contained in said transport stream, and

an ECM analyzing means for analyzing enciphered ECM data contained in said transport stream.

61. A program distribution system according to claim 59,

wherein said security module comprises:

a memory means for storing a subscriber's subscription information contained in said EMM data,

a first decryption means for receiving said enciphered work key contained in said transmitted transport stream as well as the same master key as that used by said subscriber management system to decipher said enciphered work key with said master key, and

a second decryption means for receiving said enciphered scramble key contained in said transport stream as well as said deciphered work key supplied by said first decryption means to decipher said enciphered scramble key with said deciphered work key.

62. A program distribution system according to claim 61, wherein said CPU identifies a transport stream packet containing each of data elements constituting said program by analyzing a program association table and a program map table contained in said transport stream and controls said demultiplexer to provide said transport stream packet containing said data element to appropriate one of said scramblers.

63. A program distribution system according to claim 62, wherein said CPU detects a transport stream packet

containing EMM data by analyzing a conditional access table contained in said transport stream,

said CPU filters, from said transport stream containing said EMM data, only a transport stream packet having EMM data on a program subscribed for by a subscriber, and

said CPU obtains said enciphered work key from said EMM data by analyzing said EMM data contained in said filtered transport stream packet.

64. A program distribution system according to claim 61, wherein said CPU detects transport stream packets containing a plurality of data elements constituting said program and said ECM data, respectively, by analyzing a program association table contained in said transport stream and a program map table specified by said program association table, and

said CPU controls said demultiplexer to supply said transport stream packets containing said plurality of data elements to said descramblers, respectively, and to receive said transport stream packet containing said ECM data.

65. A program distribution system according to claim 64, wherein said CPU filters, from said transport stream packets containing said enciphered ECM data supplied by said demultiplexer, only a transport stream packet having

enciphered ECM data on a program or data element subscribed for by a subscriber, and

said CPU obtains said enciphered scramble key from said enciphered ECM data by analyzing said enciphered ECM data contained in said filtered transport stream packet.

66. A program distribution system according to claim 65, wherein if the correspondence between said program number and the packet ID of said enciphered ECM packet is described according to the syntax of said program map table,

said CPU supplies to said security module an enciphered scramble key contained in said enciphered ECM packet specified by said packet ID as an enciphered scramble key corresponding to said program, and

if the correspondence between a plurality of data elements constituting said program and the packet IDs of said plurality of enciphered ECM packets is described according to the syntax of said program map table,

said CPU supplies to said security module a plurality of different scramble keys contained in said enciphered ECM packets specified by said plurality of packet IDs as enciphered scramble keys corresponding to said plurality of data elements.

67. A program distribution system according to claim 66,

wherein if an enciphered scramble key associated with said program is supplied by said CPU, said security module deciphers said supplied enciphered scramble key to supply the same scramble key to a plurality of descramblers corresponding to a plurality of data elements constituting said program, respectively, and

if a plurality of enciphered scramble keys associated with said plurality of data elements are supplied by said CPU, said security module deciphers said plurality of supplied enciphered scramble keys, respectively, to supply different scramble keys to a plurality of descramblers corresponding to subscribed data elements among said plurality of data elements.

68. A program transmission system for transmitting a program consisting of a plurality of data elements, said program transmission system comprising:

a subscriber authorization system for generating a plurality of scramble keys to be used for scrambling a plurality of data elements contained in said program so that a subscriber can watch and/or hear only programs or data elements subscribed for by said subscriber,

a multiplexer system comprising:

an encoding system for encoding each of said data elements contained in said program to generate encoded

streams consisting of encoded data elements for each program,

a multiplexing means for multiplexing said encoded streams provided for each program by said encoding system, and

a scramble means for selectively scrambling each of said encoded data elements contained in said multiplexed stream based on said scramble key generated by said subscriber authorization system, and

a transmission system for transmitting a stream multiplexed by said multiplexer system.

69. A program transmission system for transmitting a plurality of programs each consisting of a plurality of data elements, said program transmission system comprising:

a scramble key generation means for generating a scramble key corresponding to each of said data elements,

an encoding means for encoding each of said data elements contained in said plurality of programs to generate encoded streams consisting of encoded data elements for each program,

a multiplexing means for multiplexing said encoded streams provided for each program by said encoding means to generate a multiplexed stream,

a scramble means for scrambling each of said encoded data elements contained in said multiplexed stream based on

said scramble key generated by said scramble key generation means, and

a transmission system for transmitting said scrambled multiplexed stream.

70. A pay broadcast system for broadcasting a program consisting of a plurality of data elements, said pay broadcast system comprising:

a subscriber management system for managing subscribers' subscriptions for each data element and for accounting to said subscribers based on the data elements subscribed for by them,

a subscriber authorization system for generating a plurality of scramble keys to be used for scrambling each of said data elements contained in said program so that a subscriber can watch and/or hear only data elements subscribed for by said subscriber, and

a multiplexer system comprising:

an encoding system for encoding each of said data elements contained in said program to generate encoded streams consisting of encoded data elements for each program,

a multiplexing means for multiplexing said encoded streams provided for each program by said encoding system, and

a scramble means for selectively scrambling each

of said encoded data elements contained in said multiplexed stream based on said plurality of scramble keys generated by said subscriber authorization system.

71. A program transmission method for transmitting a program consisting of a plurality of data elements, said method comprising:

a scramble key generation step for generating a plurality of scramble keys to be used for scrambling a plurality of data elements contained in said program so that a subscriber can watch and/or hear only programs or data elements subscribed for by said subscriber,

an encoding step for encoding each of said data elements contained in said program to generate encoded streams consisting of encoded data elements for each program,

a multiplexing step for multiplexing said encoded streams provided for each program by said encoding step, and

a scramble step for selectively scrambling each of said encoded data elements contained in said multiplexed stream based on said generated scramble key.

72. A program transmission method according to claim 71, wherein said scramble key generation step enciphers with a master key a work key used for enciphering said scramble key, said scramble key generation step provides said

enciphered work key and a subscriber identification number for identifying said subscriber as enciphered EMM data, and

said scramble key generation step provides a work key identification number for identifying said enciphered work key and said scramble key as ECM data.

73. A program transmission method according to claim 72, further comprising a program specific information generation step for generating a program specific information for indicating how to multiplex said plurality of programs, said plurality of data elements constituting said programs, said plurality of ECM data streams, and said plurality of EMM data streams, and

said multiplexing step multiplexes said plurality of programs, said plurality of data elements, said plurality of ECM data streams, and said plurality of EMM data streams according to said generated program specific information.

74. A program transmission method according to claim 73, wherein said scramble key generation step provides said enciphered EMM data and said ECM data as enciphered EMM packets and ECM packets in the form of transport stream packets, respectively,

said encoding step provides said encoded data elements as elementary packets in the form of transport stream

packets, and

said program specific information generation step provides said program specific information as PSI packets in the form of transport stream packets.

75. A program transmission method according to claim 74, wherein said multiplexing step comprises an encryption step for enciphering a scramble key contained in said ECM data.

76. A program transmission method according to claim 75, wherein said scramble key generation step generates a work key table which shows the correspondence between said work key and a work key identification number for identifying said work key.

77. A program transmission method according to claim 76, wherein said encryption step in said multiplexing step obtains a work key from said work key identification number contained in said ECM data by referencing said work key table,

said encryption step enciphers said scramble key contained in said ECM data by using said work key obtained from said work key table, and

said encryption step provides said enciphered scramble key enciphered by said second encryption circuit as

enciphered ECM data.

78. A program transmission method according to claim 77, wherein said program specific information generation step assigns to all transport stream packets supplied to said multiplexer system in the form of transport stream packets, packet IDs for identifying said transport stream packets.

79. A program transmission method according to claim 78, wherein said program specific information consists of at least a program association table, a program map table, and a conditional access table.

80. A program transmission method according to claim 79, wherein said program specific information generation step supplies to said multiplexer system a transport stream packet containing said program association table as a PAT packet,

said program specific information generation step supplies to said multiplexer system a transport stream packet containing said program map table as a PMT packet, and

said program specific information generation step supplies to said multiplexer system a transport stream packet containing said conditional access table as a CAT

packet.

81. A program transmission method according to claim 80, wherein said program association table is a table for specifying a program number and the packet ID of a PMT packet corresponding to said program number,

said program map table is a table for specifying the packet ID of a transport stream packet containing each of a plurality of data elements constituting a program, and

said conditional access table is a table for specifying the packet ID of said enciphered EMM packet.

82. A program transmission method according to claim 81, wherein said program association table describes the program number for indicating a program and the packet ID of a PMT packet associated with said program, and

said program map table describes the program number for indicating said program, a plurality of packet IDs containing transport stream packets containing a plurality of data elements constituting said program, and a descriptor for specifying the packet ID of an enciphered ECM packet associated with said program or said data element.

83. A program transmission method according to claim 82, wherein if said descriptor in said program map table is

described at a location corresponding to said program number, said descriptor specifies the packet ID of an ECM packet containing a scramble key for scrambling all data elements of said plurality of data elements constituting said program, and

if said descriptor in said program map table is described at a location corresponding to each of said data elements of said program, said descriptor specifies the packet IDs of a plurality of ECM packets containing a plurality of scramble keys for scrambling said plurality of data elements constituting said program, respectively.

84. A program transmission method according to claim 83, wherein if said program has a first data element through an n'th data element and at least one different scramble key is specified for said first data element through said n'th data element,

said program map table describes the correspondence between the packet ID of a transport stream packet containing said first data element and the packet ID of a transport stream packet containing ECM data containing a scramble key for scrambling said first data element, and

said program map table describes the correspondence between the packet ID of a transport stream packet containing said n'th data element and the packet ID of a

transport stream packet containing ECM data containing a scramble key for scrambling said n'th data element.

85. A program transmission method according to claim 80, wherein said scramble step does not scramble said program specific information, said EMM data, and said ECM data but scrambles only said data elements by using scramble keys specified for said data elements based on a table which shows the correspondence between the packet ID of a transport stream packet containing each of said data elements and a scramble key specified for said data element.

86. A program transmission method according to claim 80, wherein said program specific information generation step generates a table which shows the correspondence between the packet ID assigned to each transport stream packet and a scramble key used for scrambling data contained in said transport stream packet, and

said program specific information generation step supplies to said multiplexer system said table for showing the correspondence between said packet IDs and said scramble keys.

87. A program transmission method according to claim 86, wherein said scramble means does not scramble said program

specific information, said EMM data, and said ECM data but scrambles only said data elements by referencing said table for showing the correspondence between said packet IDs and said scramble keys.

88. A program transmission method according to claim 86, wherein said scramble step detects the packet IDs of all transport stream packets supplied by said multiplexing means to said scramble means,

said scramble step determines whether scramble keys are defined for said detected packet IDs based on said table which shows the correspondence between said packet IDs and said scramble keys,

if some scramble keys are defined for said packet IDs, said scramble step scrambles data elements contained in transport stream packets indicated by said packet IDs with said defined scramble keys, and

if no scramble keys are defined for said packet IDs, said scramble step does not scramble data contained in transport stream packets indicated by said packet IDs.

89. A program transmission method according to claim 74, wherein said multiplexing step enciphers said scramble keys with said work key, and

said multiplexing step buffers said PAT packets, said

PMT packets, said CAT packets, said transport stream packets containing said data elements, said enciphered EMM packets, and said enciphered ECM packets in a plurality of buffer means, respectively.

90. A program transmission method according to claim 89, wherein said multiplexing step monitors free area of a plurality of buffers for buffering said transport stream packets containing said data elements, and

if any of said plurality of buffers for buffering said transport stream packets containing said data elements is likely to overflow, said EMM packets are not provided to said multiplexing means by a buffer for buffering said EMM packets and instead, said transport stream packets containing said data elements are provided by said buffer likely to overflow.

91. A conditional access system for providing a conditional access to only subscribed programs and data elements among a plurality of programs and a plurality of data elements constituting said programs distributed by a program distribution system, said conditional access system comprising:

a demultiplexer means for demultiplexing, from said transport stream, a transport stream packet containing a

plurality of scrambled data elements constituting said program and for demultiplexing a plurality of transport stream packets containing a plurality of enciphered scramble keys associated with said plurality of data elements,

a filter means for filtering, from said plurality of transport stream packets containing said plurality of demultiplexed enciphered scramble keys, a transport stream packet containing an enciphered scramble key associated with said programs and data elements subscribed for by a subscriber,

a decryption means for deciphering said plurality of enciphered scramble keys contained in said plurality of filtered transport stream packets to generate a plurality of deciphered scramble keys,

a descramble means for descrambling said plurality of demultiplexed data elements for each data element by using said plurality of deciphered scramble keys associated with said plurality of data elements, and

a decoding means for decoding said plurality of data elements descrambled by said descramble means.

92. A conditional access system according to claim 91, wherein said program distribution system comprises:

a subscriber management system for managing subscribers' subscriptions for each program or data element,

a subscriber authorization system for generating a plurality of scramble keys to be used for scrambling each of said data elements contained in said program so that a subscriber can watch and/or hear only data programs or elements subscribed for by said subscriber,

a multiplexer system comprising:

an encoding system for encoding each of said data elements contained in said program to generate encoded streams consisting of encoded data elements for each program,

a multiplexing means for multiplexing said encoded streams generated for each program by said encoding system, and

a scramble means for selectively scrambling each of said encoded data elements contained in said multiplexed stream based on said scramble key generated by said subscriber authorization system, and

a transmission system for transmitting a stream multiplexed by said multiplexer system.

93. A conditional access system according to claim 92, wherein said subscriber authorization system comprises a first encryption means for enciphering a work key used for enciphering said scramble key with a master key,

said subscriber authorization system supplies to said multiplexer system an enciphered work key enciphered by said

first encryption means and a subscriber identification number for identifying said subscriber as enciphered EMM data, and

said subscriber authorization system supplies to said multiplexer system a work key identification number for identifying said enciphered work key enciphered by said encryption means and said scramble key as ECM data.

94. A conditional access system according to claim 93, comprising an encoder/multiplexer control system which generates a program specific information for indicating how to multiplex said plurality of programs, said plurality of data elements constituting said programs, said plurality of ECM data streams, and said plurality of EMM data streams, and controls said encoder system and said multiplexer system to multiplex said plurality of programs, said plurality of data elements, said plurality of ECM data streams, and said plurality of EMM data streams according to said generated program specific information.

95. A conditional access system according to claim 94, wherein said encoder system supplies to said multiplexer system said encoded data elements as elementary packets in the form of transport stream packets,

said subscriber authorization system supplies to said

002090 009090  
multiplexer system said enciphered EMM data and said ECM data as enciphered EMM packets and ECM packets in the form of transport stream packets, respectively, and

said encoder/multiplexer control system supplies to said multiplexer system said program specific information as PSI packets in the form of transport stream packets.

96. A conditional access system according to claim 95, wherein said multiplexer system further comprises a second encryption means for enciphering a scramble key contained in said ECM data.

97. A conditional access system according to claim 96, wherein said subscriber authorization system supplies to said second encryption means of said multiplexer system a work key table which shows the correspondence between said work key and a work key identification number for identifying said work key.

98. A conditional access system according to claim 97, wherein said second encryption means obtains a work key from said work key identification number contained in said ECM data by referencing said work key table,

said second encryption means enciphers said scramble key contained in said ECM data by using said work key

obtained from said work key table, and

said second encryption means supplies to said multiplexing means said enciphered scramble key enciphered by said second encryption means as enciphered ECM data.

99. A conditional access system according to claim 98, wherein said encoder/multiplexer control system assigns to all transport stream packets supplied to said multiplexer system in the form of transport stream packets, packet IDs for identifying said transport stream packets.

100. A conditional access system according to claim 99, wherein said program specific information consists of at least a program association table, a program map table, and a conditional access table.

101. A conditional access system according to claim 100, wherein said encoder/multiplexer control system supplies to said multiplexer system a transport stream packet containing said program association table as a PAT packet,

said encoder/multiplexer control system supplies to said multiplexer system a transport stream packet containing said program map table as a PMT packet, and

said encoder/multiplexer control system supplies to said multiplexer system a transport stream packet containing

said conditional access table as a CAT packet.

102. A conditional access system according to claim 101, wherein said program association table is a table for specifying a program number and the packet ID of a PMT packet corresponding to said program number,

said program map table is a table for specifying the packet ID of a transport stream packet containing each of a plurality of data elements constituting a program, and

said conditional access table is a table for specifying the packet ID of said enciphered EMM packet.

103. A conditional access system according to claim 102, wherein said program association table describes the program number for indicating a program and the packet ID of a PMT packet associated with said program, and

said program map table describes the program number for indicating said program, a plurality of packet IDs containing transport stream packets containing a plurality of data elements constituting said program, and a descriptor for specifying the packet ID of an enciphered ECM packet associated with said program or said data element.

104. A conditional access system according to claim 103, wherein if said descriptor in said program map table is

described at a location corresponding to said program number, said descriptor specifies the packet ID of an ECM packet containing a scramble key for scrambling all data elements of said plurality of data elements constituting said program, and

if said descriptor in said program map table is described at a location corresponding to each of said data elements of said program, said descriptor specifies the packet IDs of a plurality of ECM packets containing a plurality of scramble keys for scrambling said plurality of data elements constituting said program, respectively.

105. A conditional access system according to claim 104, wherein if said program has a first data element through an n'th data element and at least one different scramble key is specified for said first data element through said n'th data element,

said program map table describes the correspondence between the packet ID of a transport stream packet containing said first data element and the packet ID of a transport stream packet containing ECM data containing a scramble key for scrambling said first data element, and

said program map table describes the correspondence between the packet ID of a transport stream packet containing said n'th data element and the packet ID of a

transport stream packet containing ECM data containing a scramble key for scrambling said n'th data element.

106. A conditional access system according to claim 101, wherein said scramble means does not scramble said program specific information, said EMM data, and said ECM data but scrambles only said data elements by using scramble keys specified for said data elements based on a table which shows the correspondence between the packet ID of a transport stream packet containing each of said data elements and a scramble key specified for said data element.

107. A conditional access system according to claim 101, wherein said encoder/multiplexer control system generates a table which shows the correspondence between the packet ID assigned to each transport stream packet and a scramble key used for scrambling data contained in said transport stream packet, and

said encoder/multiplexer control system supplies to said multiplexer system said table for showing the correspondence between said packet IDs and said scramble keys.

108. A conditional access system according to claim 107, wherein said scramble means does not scramble said program

specific information, said EMM data, and said ECM data but scrambles only said data elements by referencing said table for showing the correspondence between said packet IDs and said scramble keys.

109. A conditional access system according to claim 107, wherein said scramble means detects the packet IDs of all transport stream packets supplied by said multiplexing means to said scramble means,

said scramble means determines whether scramble keys are defined for said detected packet IDs based on said table which shows the correspondence between said packet IDs and said scramble keys,

if some scramble keys are defined for said packet IDs, said scramble means scrambles data elements contained in transport stream packets indicated by said packet IDs with said defined scramble keys, and

if no scramble keys are defined for said packet IDs, said scramble means does not scramble data contained in transport stream packets indicated by said packet IDs.

110. A conditional access system according to claim 95, wherein said multiplexer system further comprises:

a second encryption means for enciphering said scramble keys, and

002090 009090

a plurality of buffer means for buffering said PAT packets, said PMT packets, said CAT packets, said transport stream packets containing said data elements, said enciphered EMM packets, and said enciphered ECM packets, respectively, and for providing said transport stream packets to said multiplexing means.

111. A conditional access system according to claim 110, wherein said multiplexer system monitors free area of a plurality of buffers for buffering said transport stream packets containing said data elements, and

if any of said plurality of buffers for buffering said transport stream packets containing said data elements is likely to overflow, said EMM packets are not provided to said multiplexing means by a buffer for buffering said EMM packets and instead, said transport stream packets containing said data elements are provided to said multiplexing means by said buffer likely to overflow.

112. A conditional access system according to claim 109, wherein said filter means comprises:

a PAT analyzing means for analyzing a program association table contained in said transport stream,

a PMT analyzing means for analyzing a program map table contained in said transport stream,

a CAT analyzing means for analyzing a conditional access table contained in said transport stream,

an EMM analyzing means for analyzing enciphered EMM data contained in said transport stream, and

an ECM analyzing means for analyzing enciphered ECM data contained in said transport stream.

113. A conditional access system according to claim 109, wherein said decryption means comprises:

a memory means for storing a subscriber's subscription information contained in said EMM data,

a first decryption means for receiving said enciphered work key contained in said transmitted transport stream as well as the same master key as that used by said subscriber management system to decipher said enciphered work key with said master key, and

a second decryption means for receiving said enciphered scramble key contained in said transport stream as well as said deciphered work key supplied by said first decryption means to decipher said enciphered scramble key with said deciphered work key.

114. A conditional access system according to claim 113, wherein said demultiplexer means and said filter means identify a transport stream packet containing each of data

elements constituting said program by analyzing a program association table and a program map table contained in said transport stream and control said demultiplexer to provide said transport stream packet containing said data element to appropriate one of said scramblers.

115. A conditional access system according to claim 114, wherein said demultiplexer means and said filter means detect a transport stream packet containing EMM data by analyzing a conditional access table contained in said transport stream,

said demultiplexer means and said filter means filter, from said transport stream containing said EMM data, only a transport stream packet having EMM data on a program subscribed for by a subscriber, and

said demultiplexer means and said filter means obtain said enciphered work key from said EMM data by analyzing said EMM data contained in said filtered transport stream packet.

116. A conditional access system according to claim 113, wherein said demultiplexer means and said filter means detect transport stream packets containing a plurality of data elements constituting said program and said ECM data, respectively, by analyzing a program association table

contained in said transport stream and a program map table specified by said program association table, and

said demultiplexer means and said filter means control said demultiplexer to supply said transport stream packets containing said plurality of data elements to said descramblers, respectively, and to receive said transport stream packet containing said ECM data.

117. A conditional access system according to claim 116, wherein said demultiplexer means and said filter means filter, from said transport stream packets containing said enciphered ECM data supplied by said demultiplexer, only a transport stream packet having enciphered ECM data on a program or data element subscribed for by a subscriber, and

said demultiplexer means and said filter means obtain said enciphered scramble key from said enciphered ECM data by analyzing said enciphered ECM data contained in said filtered transport stream packet.

118. A conditional access system according to claim 117, wherein if the correspondence between said program number and the packet ID of said enciphered ECM packet is described according to the syntax of said program map table,

said filter means supplies to said decryption means an enciphered scramble key contained in said enciphered ECM

packet specified by said packet ID as an enciphered scramble key corresponding to said program, and

if the correspondence between a plurality of data elements constituting said program and the packet IDs of said plurality of enciphered ECM packets is described according to the syntax of said program map table,

said filter means supplies to said decryption means a plurality of different scramble keys contained in said enciphered ECM packets specified by said plurality of packet IDs as enciphered scramble keys corresponding to said plurality of data elements.

119. A conditional access system according to claim 118, wherein if an enciphered scramble key associated with said program is supplied by said filter means, said decryption means deciphers said supplied enciphered scramble key to supply the same scramble key to a plurality of descramblers corresponding to a plurality of data elements constituting said program, respectively, and

if a plurality of enciphered scramble keys associated with said plurality of data elements are supplied by said filter means, said decryption means deciphers said plurality of supplied enciphered scramble keys, respectively, to supply different scramble keys to a plurality of descramblers corresponding to subscribed data elements among

said plurality of data elements.

120. A data reception device for receiving multiplexed data obtained by multiplexing transport stream packets of program data consisting of a plurality of data elements constructed in the form of transport stream packets, said data reception device comprising:

a scramble key extract means for extracting from said multiplexed data a scramble key corresponding to each data element, and

a descramble means for descrambling said transport stream packet for each data element contained in said multiplexed data by using a scramble key extracted by said scramble key extract means.

121. A data reception device according to claim 120, wherein said data reception device comprises a first decryption means for deciphering said enciphered scramble key extracted by said scramble key extract means by using a work key received along with said multiplexed data and descrambles said transport stream packet by using said scramble key deciphered by said first decryption means.

122. A data reception device according to claim 120, wherein said data reception device comprises a second decryption

means for deciphering said enciphered work key received along with said multiplexed data by using a prestored master key and decipherers said scramble key by using said work key deciphered by said second decryption means.

## ABSTRACT

In a data multiplexing device which multiplexes and transmits the transport stream packets of program data consisting of a plurality of data elements constructed in the form of transport stream packets, a program distribution system, a program transmission system, a pay broadcast system, a program transmission method, a conditional access system, and a data reception device according to the present invention, by generating a scramble key  $K_s$  corresponding to one or more data elements among the plurality of data elements constituting a program and by scrambling each data element, an audience can subscribe for each data element.

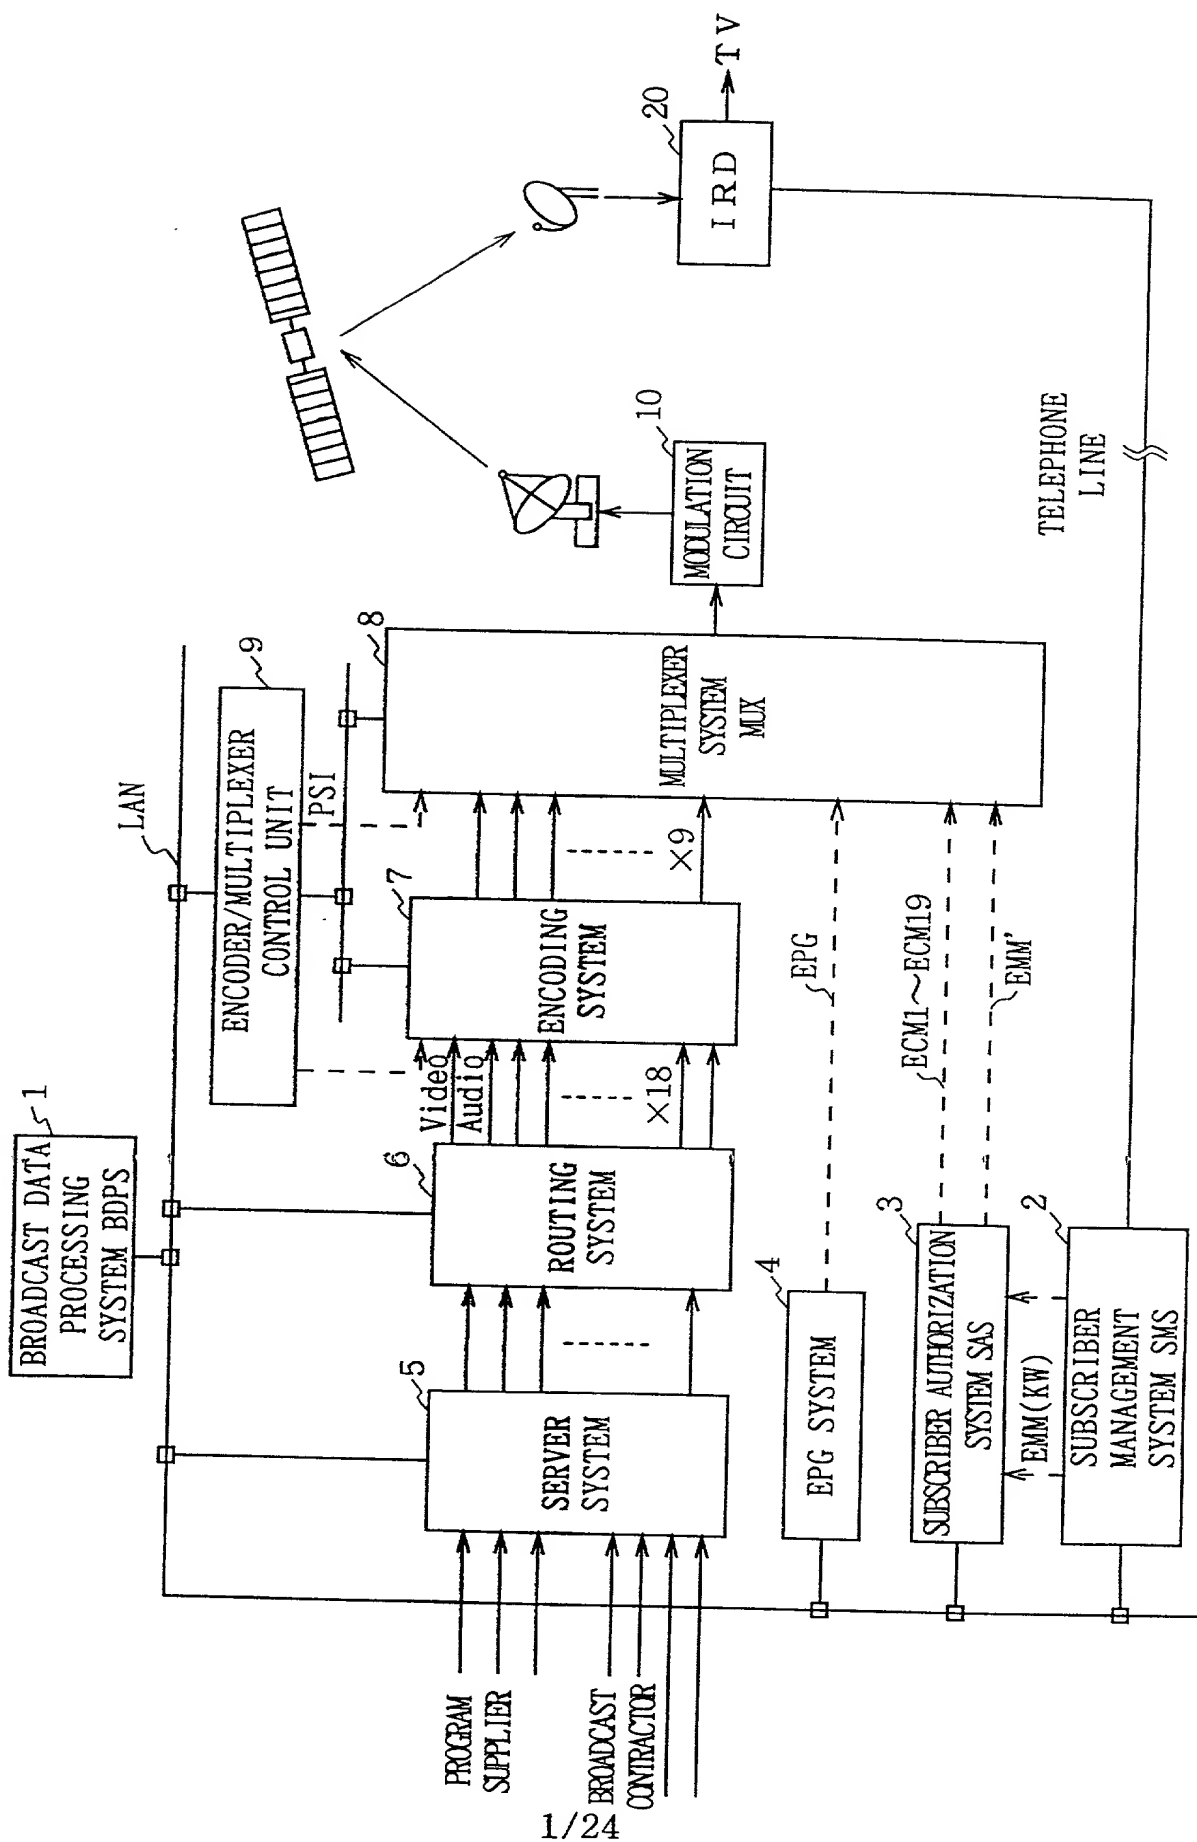


FIG. 1

Program number	Video	Main Audio	Sub Audio	Private
1	K s 1		---	---
2	K s 2		K s 3	K s 4
3	K s 5	K s 6	---	---
4	K s 7	K s 8	K s 9	K s 10
5	K s 11			
6	K s 12		---	---
7	K s 13			K s 14
8	K s 15			
9	K s 16	K s 17	K s 18	K s 19

FIG. 2

PID VALUE	INFORMATION RECORDED IN A PACKET
0x0000	PAT
0x0001	CAT
0x0002~0x000F	Reserved
0x0010	NIT、ST
0x0011	SDT、BAT、ST
0x0012	EIT、ST
0x0013	RST、ST
0x0014	TDT
0x0015~0x001F	Reserved
0x0020~0x1FFE	PMT, VIDEO/AUDIO DATA STREAM
0x1FFF	Null Packet

FIG. 3

PID TABLE

PACKET TYPE	PID VALUE	SCRAMBLE KEY
PATPACKET	0×0000 FIXED VALUE	---
⋮	⋮	
⋮	⋮	
PMT1PACKET	0×0100	---
PMT2PACKET	0×0101	---
⋮	⋮	
⋮	⋮	
⋮	⋮	
ECM1PACKET	0×0300	---
⋮	⋮	
ECM2PACKET	0×0351	---
ECM2PACKET	0×0352	---
ECM3PACKET	0×0353	---
ECM4PACKET	0×0354	---
⋮	⋮	
⋮	⋮	
⋮	⋮	
Video[1]PACKET	0×0500	K s 1
Main_Audio[1]PACKET	0×0501	K s 1
Video[2]PACKET	0×0502	K s 2
Main_Audio[2]PACKET	0×0503	K s 2
Sub_Audio[2]PACKET	0×0504	K s 3
Private[2]PACKET	0×0505	K s 4
⋮	⋮	
⋮	⋮	
⋮	⋮	
CATPACKET	0×0001 (FIXED VALUE)	---
⋮	⋮	
⋮	⋮	
⋮	⋮	
EMMPACKET	0×0700	---
⋮	⋮	
⋮	⋮	

FIG. 4

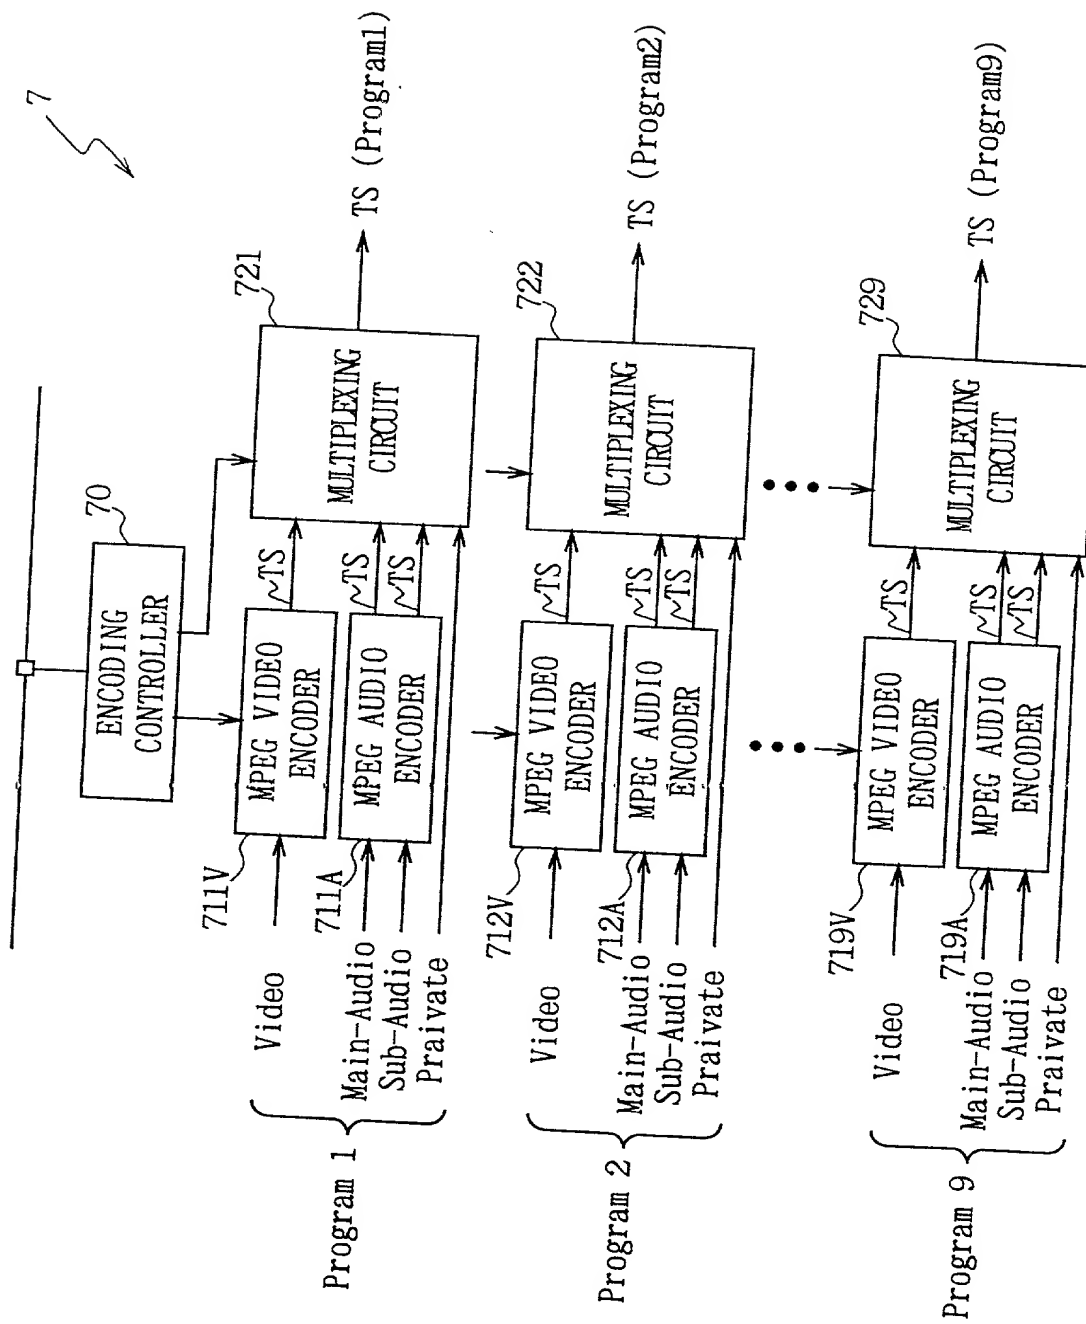




FIG. 7

```

        reserved                    5      bslbf
        if(ltw_flag=='1'){
            ltw_valid_flag          1      bslbf
            ltw_offset              15      uimsbf
        }
        if(piecewise_rate_flag=='1'){
            reserved                2      bslbf
            piecewise_rate          22      uimsbf
        }
        if(seamless_splice_flag=='1'){
            splice_type              4      bslbf
            DTS_next_AU[32..30]      3      bslbf
            market_bit              1      bslbf
            DTS_next_AU[29..15]     15      bslbf
            marker_bit              1      bslbf
            DTS_next_AU[14..0]      15      bslbf
            marker_bit              1      bslbf
        }
        for(i=0;i<N;i++){
            reserved                8      bslbf
        }
    }
    for(i=0;i<N;i++){
        stuffing_byte              8      bslbf
    }
}

```

FIG. 8

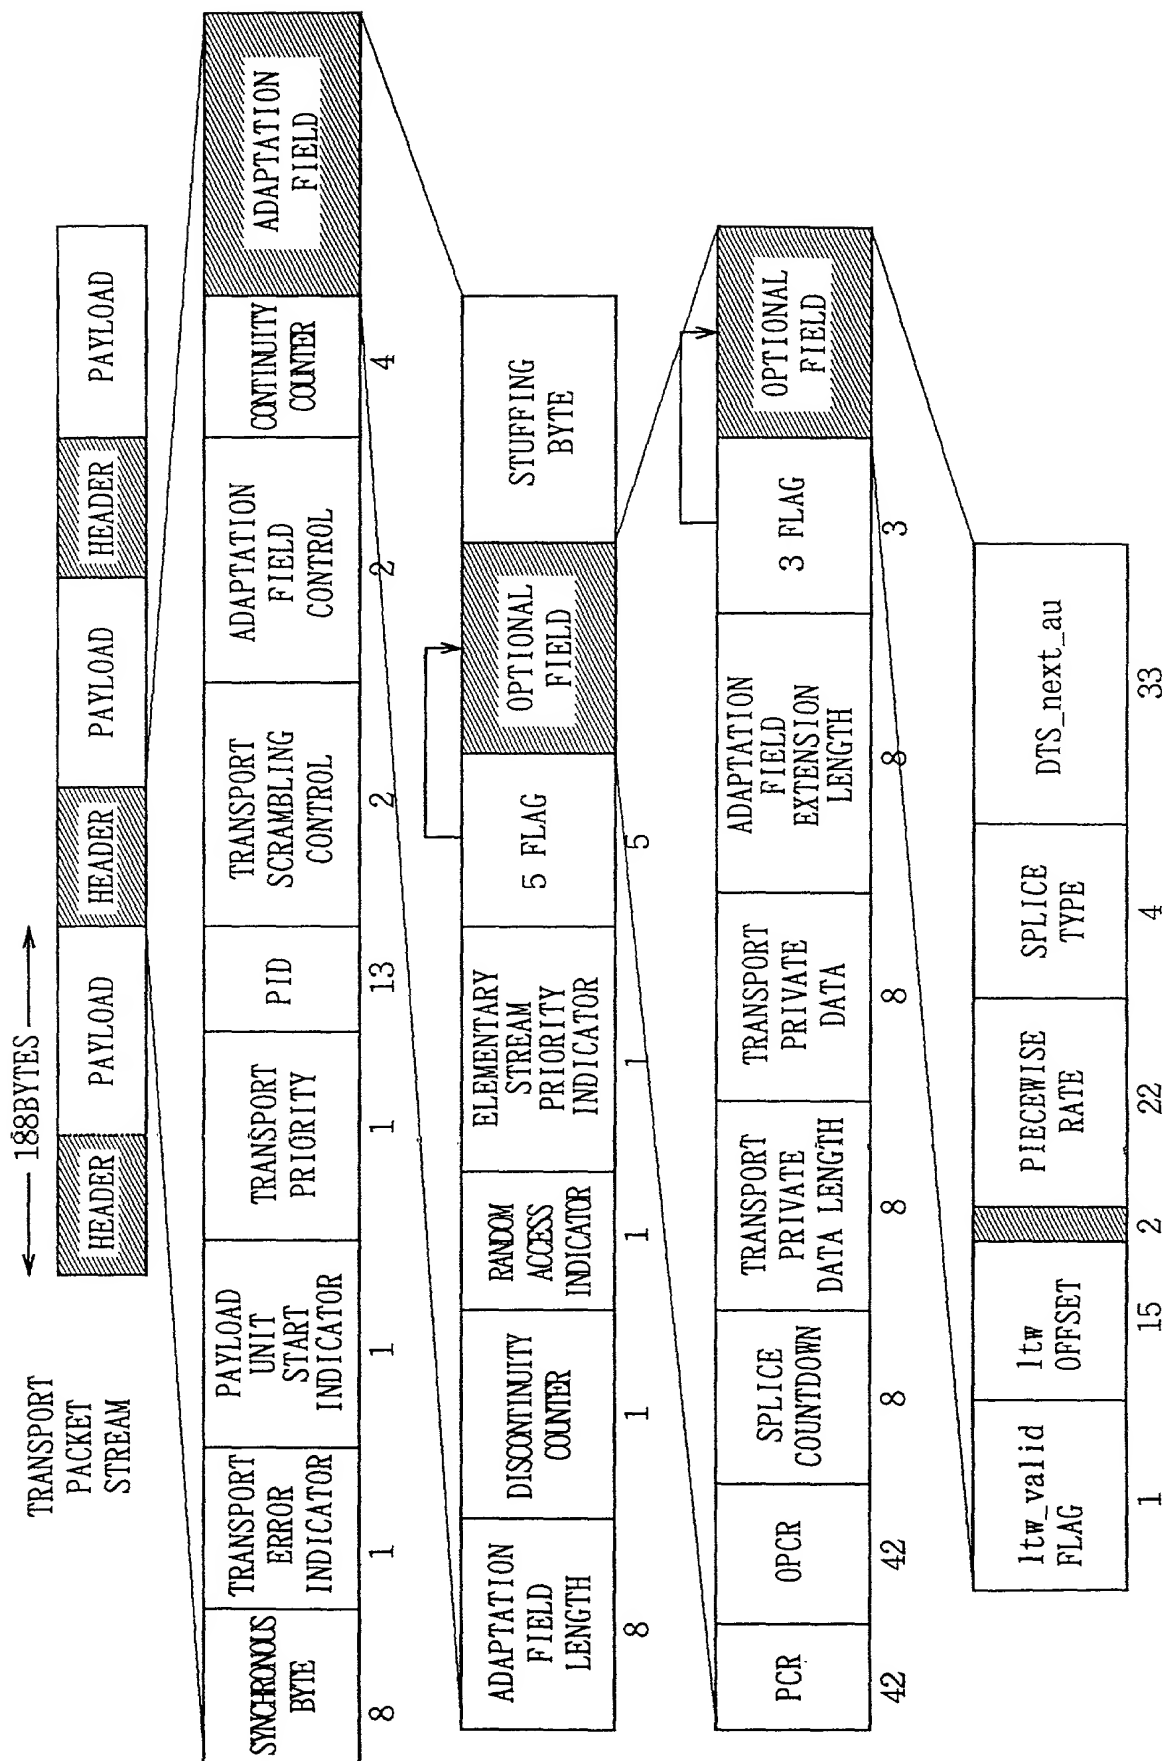


FIG. 9

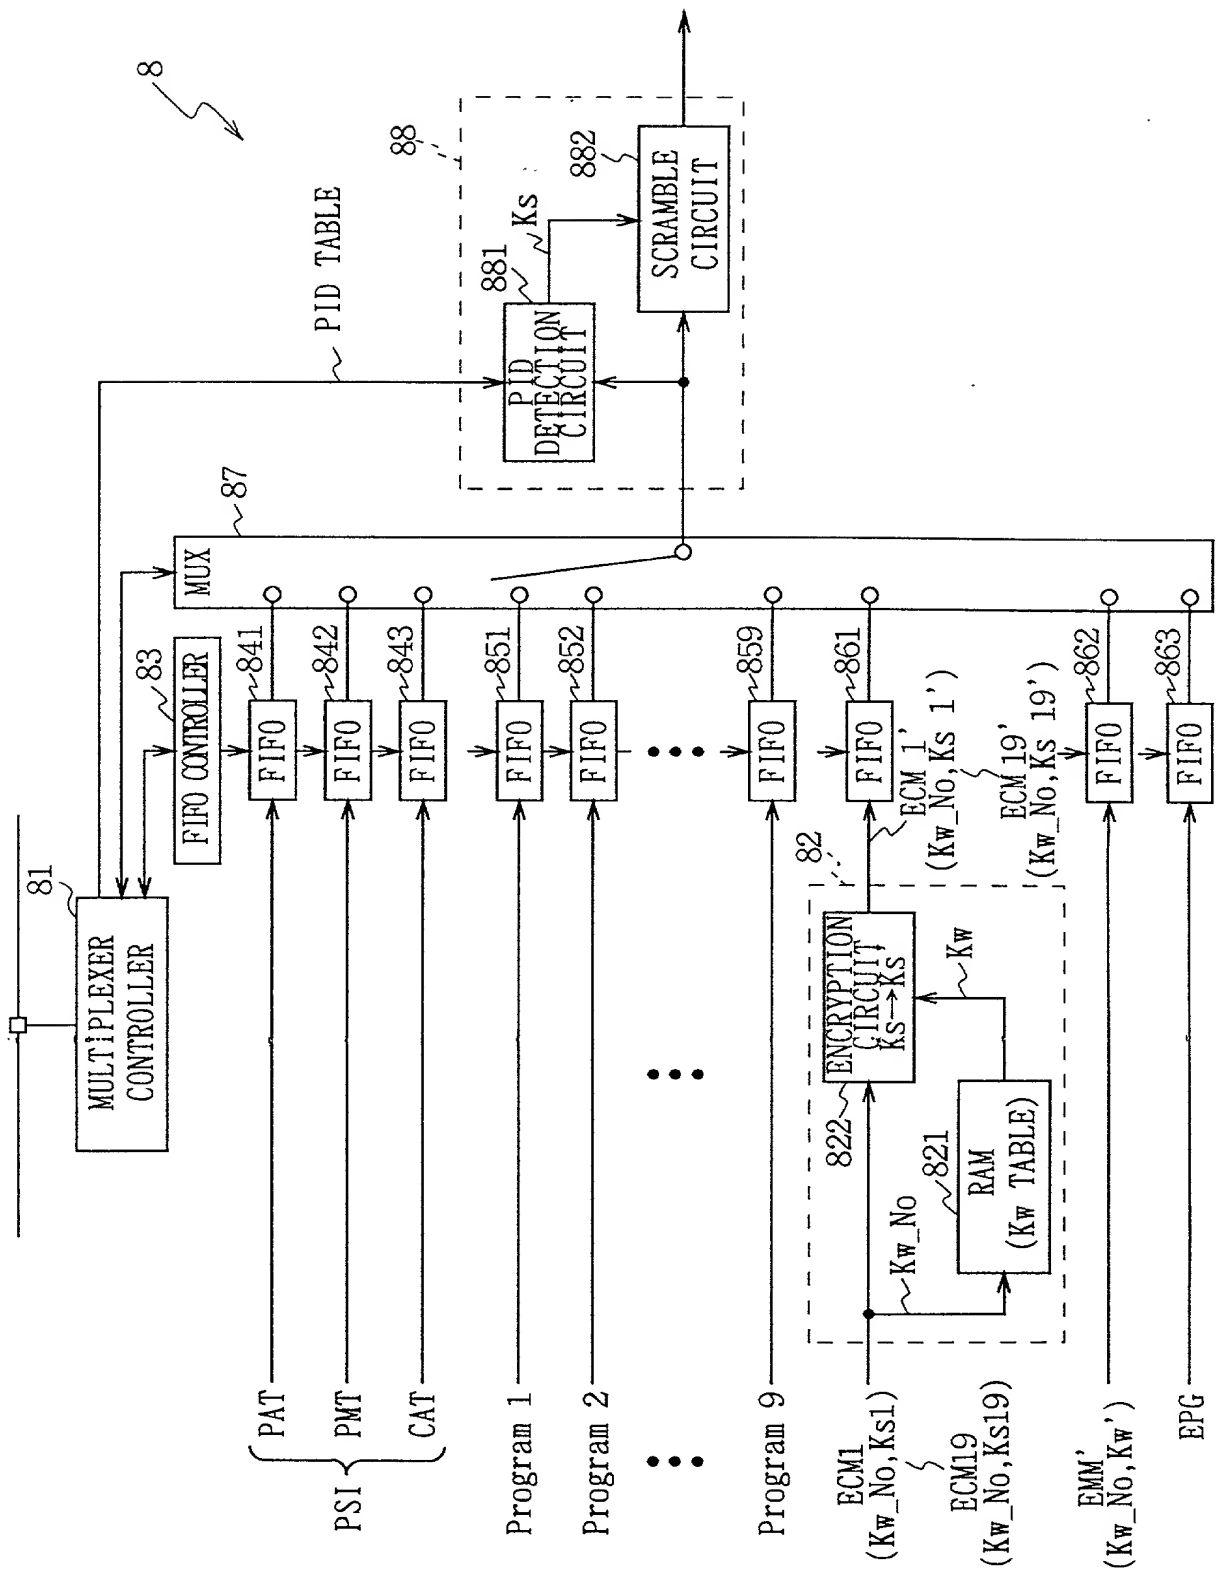


FIG. 10

002030" 000000

STRUCTURE NAME	ASSIGNED PID #	DESCRIPTION
PROGRAM ASSOCIATION TABLE (PAT)	0x00	ASSIGNS PROGRAM NUMBERS AND PROGRAM MAP TABLE PIDs
PROGRAM MAP TABLE (PMT)	ASSIGNED BY PAT	SPECIFIES PIDs FOR COMPONENTS OF MORE THAN ONE PROGRAMS
NETWORK INFORMATION TABLE (NIT)	ASSIGNED BY PAT	PHYSICAL NETWORK PARAMETERS SUCH AS FDM FREQUENCIES AND REPEATER NUMBERS
CONDITIONAL ACCESS TABLE (CAT)	0x01	ASSIGNS UNIQUE PID VALUES TO MORE THAN ONE (PRIVATE) EMM STREAMS, RESPECTIVELY

FIG. 11

SYNTAX	NUMBER OF BITS	MNEMONIC
program_association section() {		
table_id	8	uimsbf
section_syntax_indicator	1	bslbf
'0'	1	bslbf
reserved	2	bslbf
section_length	12	uimsbf
transport_stream_id	16	uimsbf
reserved	2	bslbf
version_number	5	uimsbf
current_next_indicator	1	bslbf
section_number	8	uimsbf
last_section_number	8	uimsbf
for(i=0; i<N;i++) {		
<b>program_number</b>	16	uimsbf
reserved	3	bslbf
if(program number == '0')		
{		
network_PID	13	uimsbf
}		
else {		
<b>program_map_PID</b>	13	uimsbf
}		
}		
CRC32	32	rpchof
}		

FIG. 12

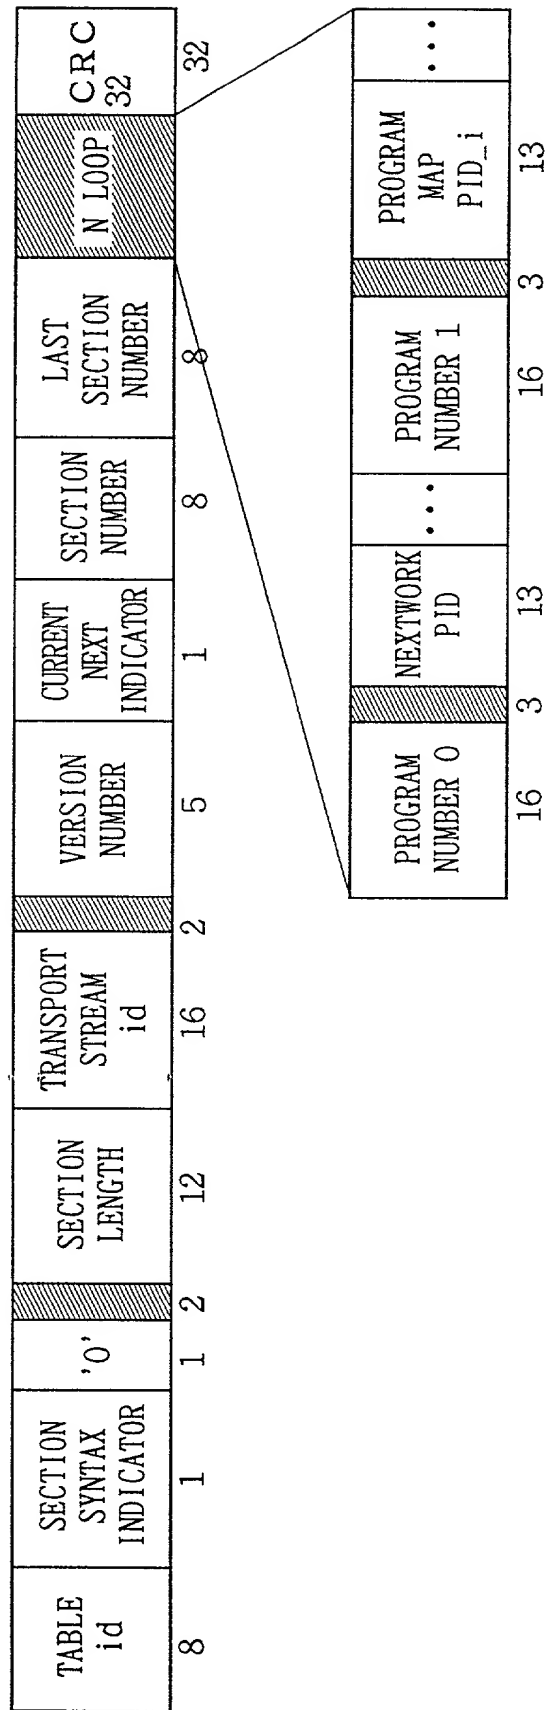


FIG. 13

VALUE	DESCRIPTION
0x00	PROGRAM ASSOCIATION SECTION
0x01	CONDITIONAL ACCESS SECTION (CA SECTION)
0x02	PROGRAM MAP SECTION
0x03-0x3F	ITU-T RECOMMENDATION H.222.0   ISO/IEC 13818 RESERVED
0x40-0xFE	USER PRIVATE
0xFF	INHIBITED

FIG. 14

SYNTAX	NUMBER OF BITS	MNEMONIC
TS_program_map_section() {		
table_id	8	uimsbf
section_syntax_indicator	1	bslbf
'0'	1	bslbf
reserved	2	bslbf
section_length	12	uimsbf
<b>program_number</b>	16	uimsbf
reserved	2	bslbf
version_number	5	uimsbf
current_next_indicator	1	bslbf
section_number	8	uimsbf
last_section_number	8	uimsbf
reserved	3	bslbf
PCR_PID	13	uimsbf
reserved	4	bslbf
program_info_length	12	uimsbf
for(i=0; i<N;i++) {		
<b>descriptor()</b>		
}		
for(i=0; i<N;i++) {		
stream_type	8	uimsbf
reserved	3	bslbf
<b>elementary_PID</b>	13	uimsbf
reserved	4	bslbf
ES_info_length	12	uimsbf
for(i=0; i<N2; i++) {		
<b>descriptor()</b>		
}		
}		
CRC32	32	rpchof
}		

FIG. 15

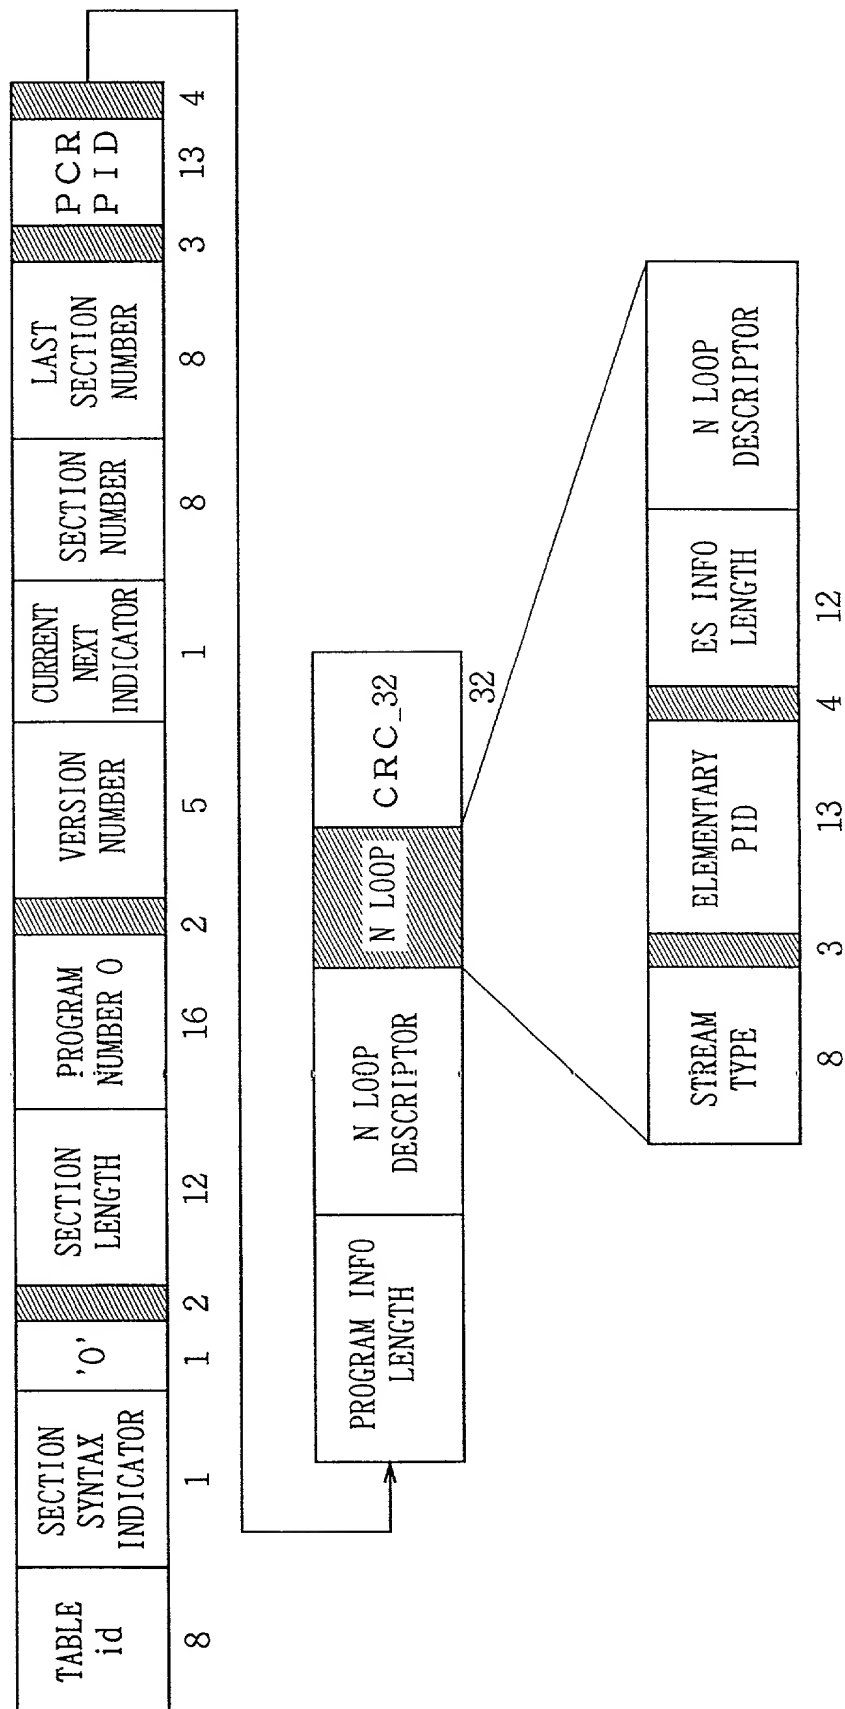


FIG. 16

SYNTAX	NUMBER OF BITS	MNEMONIC
CA_section() {		
table_id	8	uimbsf
section_syntax_indicator	1	bslbf
'0'	1	bslbf
reserved	2	bslbf
section_length	12	uimbsf
reserved	18	bslbf
version_number	5	uimbsf
current_next_indicator	1	bslbf
section_number	8	uimbsf
last_section_number	8	uimbsf
for(i=0; i<N; i++) {		
descriptor()		
}		
CRC32	32	rpchof
}		

FIG. 17

00000000000000000000000000000000

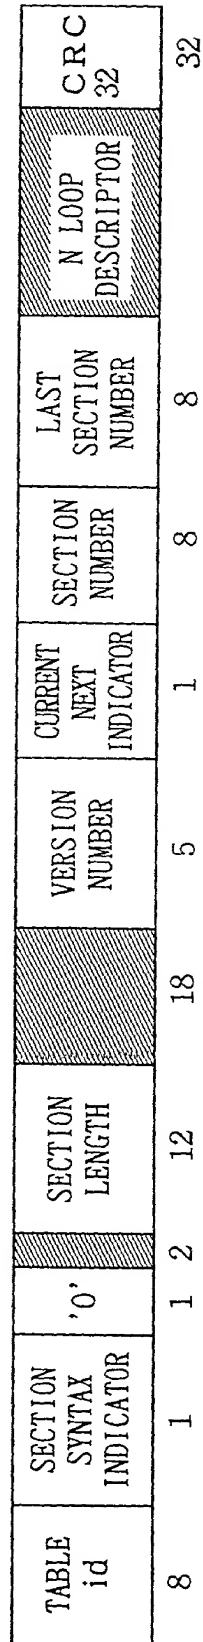


FIG. 18

002030"00903500

SYNTAX	NUMBER OF BITS	MNEMONIC
CA_descriptor() {		
descriptor_tag	8	uimbf
descriptor_length	8	uimsbf
CA_system_ID	16	uimsbf
reserved	3	bslbf
<b>CA_PID</b>	13	uimsbf
for(i=0; i<N;i++) {		
private_data_byte	8	uimsbf
}		
}		

FIG. 19

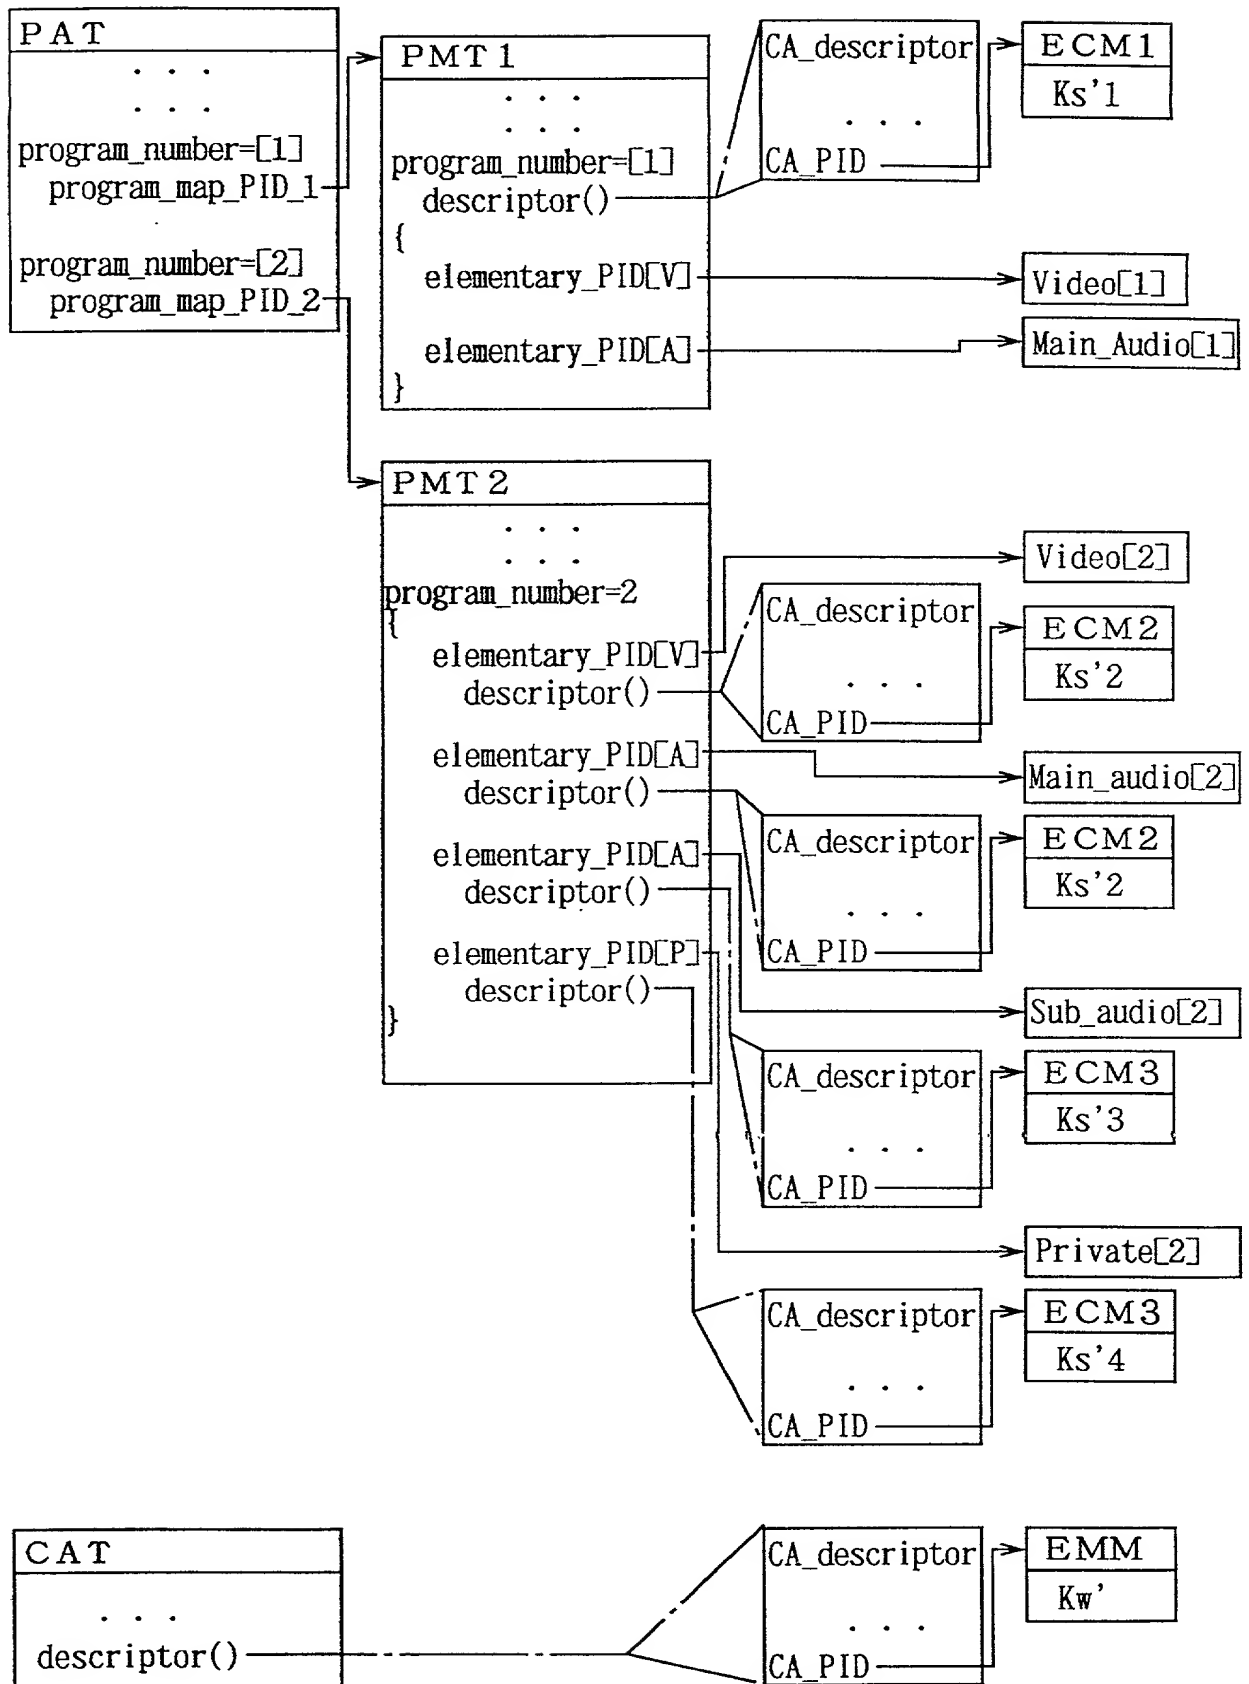


FIG. 20

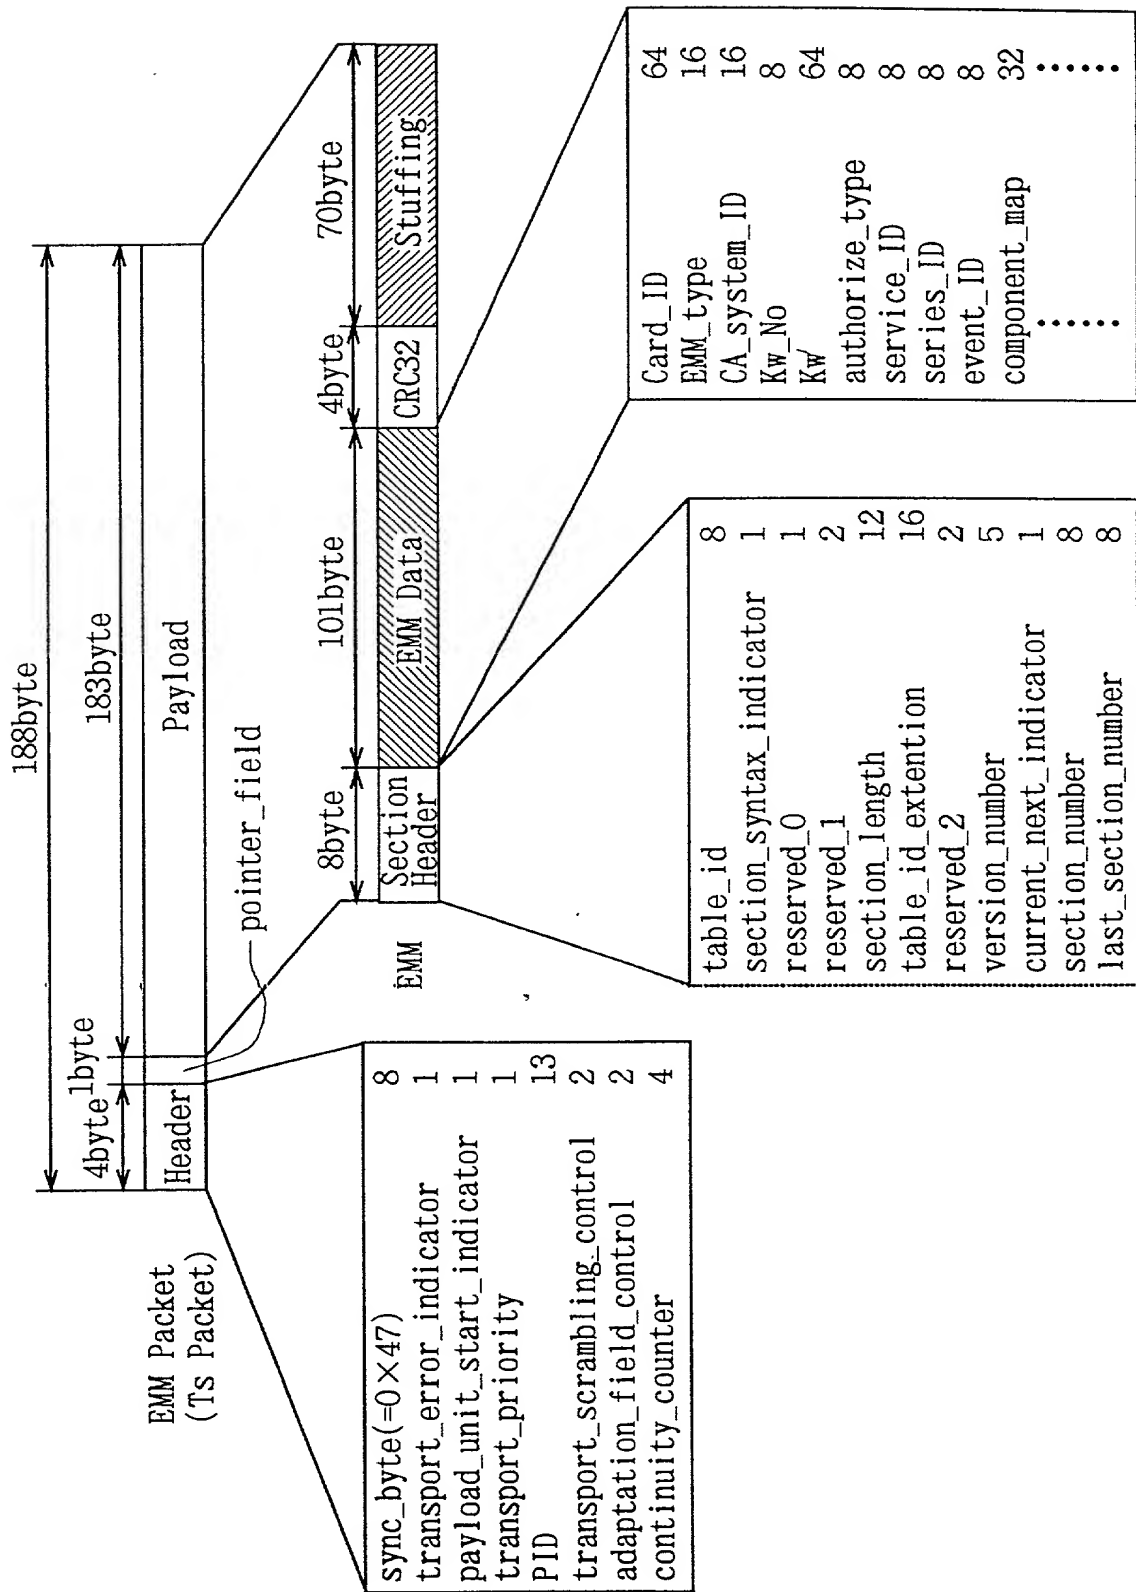


FIG. 21

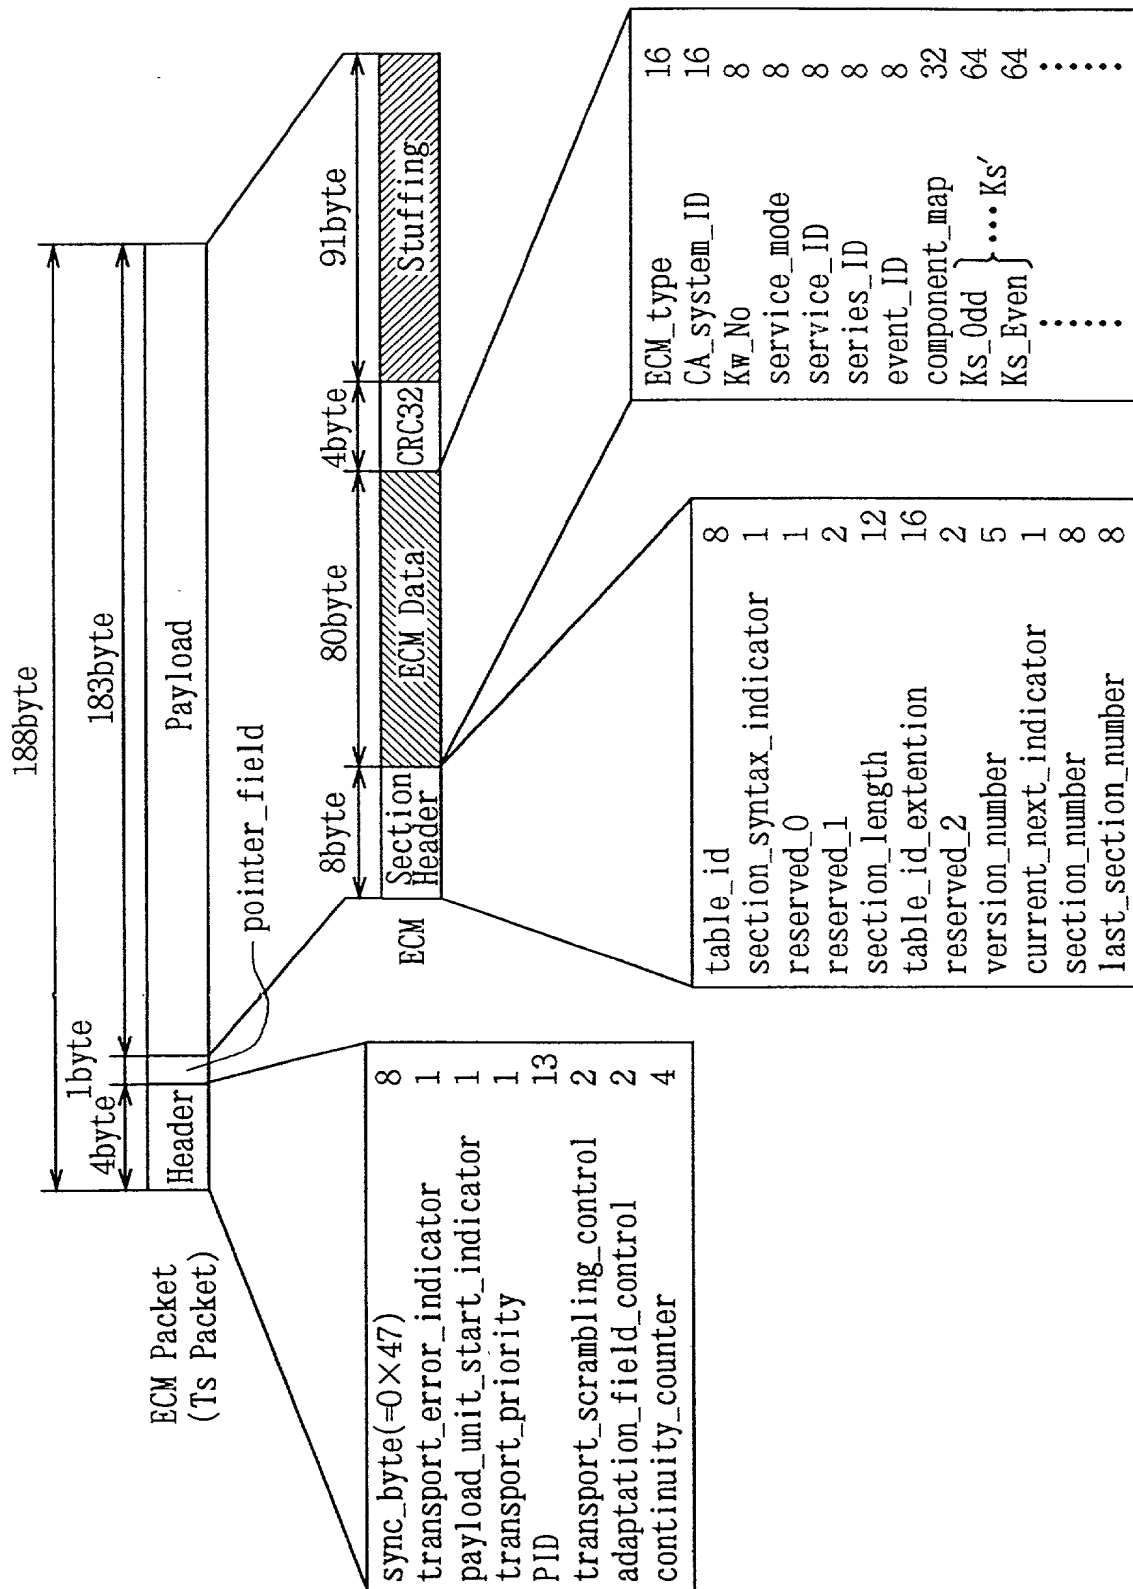


FIG. 22



## DESCRIPTION OF SYMBOLS

1 ... Broadcast Data Processing System, 2 ... Subscriber Management System, 3 ... Subscriber Authorization System, 4 ... EPG system, 5 ... Server System, 6 ... Routing System, 7 ... Encoding System, 8 ... Multiplexer System, 9 ... Encoder/Multiplexer Control Unit, 10 ... Modulation Circuit, 20 ... IRD, 21 ... Demodulation Circuit, 22 ... Demultiplexer, 24 ... IC Card, 25V, 25A, 25P ... Descrambler, 26V ... MPEG Video Decoder, 26A ... MPEG Audio Decoder, 70 ... Encoding Controller, 241 ... Memory, 242 ... First Decryption Circuit, 243 ... Second Decryption Circuit, 711V through 719V ... MPEG Video Encoder, 711A through 719A ... MPEG Audio Encoder, 721 through 729 ... Multiplexing Circuit, 841 through 863 ... Buffer Memory (FIFO).

**DECLARATION FOR PATENT APPLICATION (JOINT OR SOLE)**

**(Under 37 CFR § 1.63; with Power of Attorney)**

**FROMMER LAWRENCE & HAUG LLP**

FLH File No. 450108-4457

As a below named inventor, I hereby declare that:

This declaration is a continuation type declaration.

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention ENTITLED:

**DATA MULTIPLEXING DEVICE, PROGRAM DISTRIBUTION SYSTEM, PROGRAM TRANSMISSION SYSTEM,  
PAY BROADCAST SYSTEM, PROGRAM TRANSMISSION METHOD, CONDITIONAL ACCESS SYSTEM,  
AND DATA RECEPTION DEVICE**

the specification of which

\_\_\_ is attached hereto.

X was filed on 13 July 1998 as International Application Serial No. PCT/JP98/03127.

with amendment(s) through \_\_\_\_\_ (if applicable, give dates).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s) [list additional applications on separate page]: Priority Claimed:

Number:	Country:	Filed (Day/Month/Year):	Yes	No
9-171039	Japan	11 June 1997	X	
PCT/JP98/03127	PCT	13 July 1998	X	

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) or PCT International Application(s) designating The United States listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56, which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Prior PCT Application(s) [list additional applications on separate page]:

Appln. Ser. Number:	International Filing Date:	Status (pending, abandoned):
PCT/JP98/03127	13 July 1998	Pending

I hereby appoint WILLIAM S. FROMMER, Registration No. 25,506, and DENNIS M. SMID, Registration No. 34,930 or their duly appointed associate, my attorneys, with full power of substitution and revocation, to prosecute this application, to make alterations and amendments therein, to file continuation and divisional applications thereof, to receive the Patent, and to transact all business in the Patent and Trademark Office and in the Courts in connection therewith, and specify that all communications about the application are to be directed to the following correspondence address:

WILLIAM S. FROMMER, Esq.  
c/o FROMMER LAWRENCE & HAUG LLP  
745 Fifth Avenue  
New York, New York 10151

Direct all telephone calls to:  
(212) 588-0800  
to the attention of:  
WILLIAM S. FROMMER

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

INVENTOR(S):

Signature: Tatsuya Kubota

Full name of sole or first inventor:

Tatsuya KUBOTA

Residence:

Kanagawa, Japan

Citizenship:

Japan

Date: July 28, 1999

Signature: Norio Wakatsuki

Full name of 2nd joint inventor (if any):

Norio WAKATSUKI

Residence:

Kanagawa, Japan

Citizenship:

Japan

Date: July 28, 1999

[Similarly list additional inventors on separate page]

Post Office Address(es) of inventor(s):

[if all inventors have the same post office address]

Sony Corporation  
7-35 Kitashinagawa 6-chome  
Shinagawa-Ku, Tokyo 141, Japan

Note: In order to qualify for reduced fees available to Small Entities, each inventor and any other individual or entity having rights to the invention must also sign an appropriate separate "Verified Statement (Declaration) Claiming for Supporting a Claim by Another for Small Entity Status" form [e.g. for Independent Inventor, Small Business Concern, Nonprofit Organization, individual Non-Inventor].

Note: A post office address must be provided for each inventor.